

ADDITION TO THE

SCHNORR RESIDENCE

32 MADISON AVENUE, MAPLEWOOD, NJ 07040
BLOCK 27.07 LOT 5

PROJECT TEAM

ARCHITECT: MICHAEL J. MARVIN, JR., RA - NJ LICENSE 21A102024400
MRVN ARCHITECTURE
307 BLOOMFIELD AVENUE
SUITE 201
CALDWELL, NJ 07006
T: 646.470.2221
E: michael.marvin@mrvnarch.com

OWNER: **ERIC & LISA SCHNORR**
32 MADISON AVENUE
MAPLEWOOD, NJ 07040

SCOPE OF WORK

THE SCOPE OF WORK IS OUTLINED IN THESE DESIGN DOCUMENTS. THE CONTRACTOR SHALL REVIEW ALL DRAWINGS, SPECIFICATIONS, AND MATERIALS INCLUDED WITH THESE DESIGN DOCUMENTS AND SHALL BE COMPLETELY AWARE OF ALL REQUIREMENTS OF THE DESIGN. CONTRACTOR IS RESPONSIBLE FOR REQUESTING ADDITIONAL INFORMATION REQUIRED FOR ACCURATE BIDDING AND CONSTRUCTION. NO CREDIT WILL BE GIVEN FOR CONTRACTOR INCORRECTLY ASSUMING DESIGN INTENT, AND COST OF CORRECTING INCORRECTLY ASSUMED CONDITIONS WILL BE BORNE BY THE CONTRACTOR.

ALTERNATES

NO ALTERNATES ARE REQUESTED AS PART OF THIS SCOPE OF WORK.

SEPARATE CONTRACTS

SEPARATE CONTRACTS SHALL BE TAKEN FOR THE FOLLOWING ITEMS AND ARE NOT THE RESPONSIBILITY OF THE GENERAL CONTRACTOR.

- LANDSCAPE PLANTING AND FINISHED GRADING. ROUGH GRADING ONLY BY THE GENERAL CONTRACTOR.

REFERENCED CODES AND STANDARDS

BUILDING SUBCODE: UCC ONE- & TWO-FAMILY DWELLING SUBCODE (INTERNATIONAL RESIDENTIAL CODE / 2021, NJ EDITION)

PLUMBING SUBCODE: NATIONAL STANDARD PLUMBING CODE / 2021, NJ EDITION (NJACS:23-3.15)

ELECTRICAL SUBCODE: NATIONAL ELECTRICAL CODE (NFPA 70) / 2020 (NJAC 5:23-3.16)

ENERGY SUBCODE: ASHRAE 90.1-2019 (NJAC 5:23-3.18)

MECHANICAL SUBCODE: INTERNATIONAL MECHANICAL CODE / 2021 (NJAC 5:23-3.20)

FUEL GAS SUBCODE: INTERNATIONAL FUEL GAS CODE / 2021 (NJAC 5:23-3.22)


DRAWING INDEX

Sheet Number	Sheet Name
A000	SITE PLAN & ZONING INFORMATION
A001	GENERAL NOTES
A050	DEMOLITION PLANS
A101	CONSTRUCTION PLANS
A151	ELECTRICAL PLANS
A200	EXTERIOR ELEVATIONS
A300	SECTIONS
A400	INTERIOR ELEVATIONS - KITCHEN & MUDROOM
A500	SCHEDULES & DETAILS
A900	RENDERINGS

VARIANCE NOTES

- APPLICANT RECEIVED APPROVAL FOR A ZONING VARIANCE FOR THE FOLLOWING CONDITIONS AT THE NOVEMBER 3, 2025 MEETING OF THE TOWNSHIP OF MAPLEWOOD ZONING BOARD:
 - SIDE YARD SETBACK, EACH [FT].** ADDITION IS PROPOSED TO ALIGN WITH LEFT SIDE WALL OF EXISTING BUILDING. EXISTING LEFT SIDE SETBACK IS 3.91' (AN EXISTING NON-CONFORMING CONDITION). PERMITTED LEFT SIDE SETBACK IS 7.0' MINIMUM.
 - SIDE YARD SETBACK, COMBINED [% OF LOT WIDTH].** ADDITION IS PROPOSED TO ALIGN WITH LEFT SIDE WALL OF EXISTING BUILDING. EXISTING SIDE YARD SETBACK, COMBINED IS 23.3%. PERMITTED SIDE YARD SETBACK, COMBINED IS 25% MINIMUM.

RESOLUTION MEMORIALIZING THE BOARD'S DECISION WAS ADOPTED AT THE BOARD'S DECEMBER 1, 2025 MEETING AND CAN BE PROVIDED UPON REQUEST TO THE PROJECT ARCHITECT.

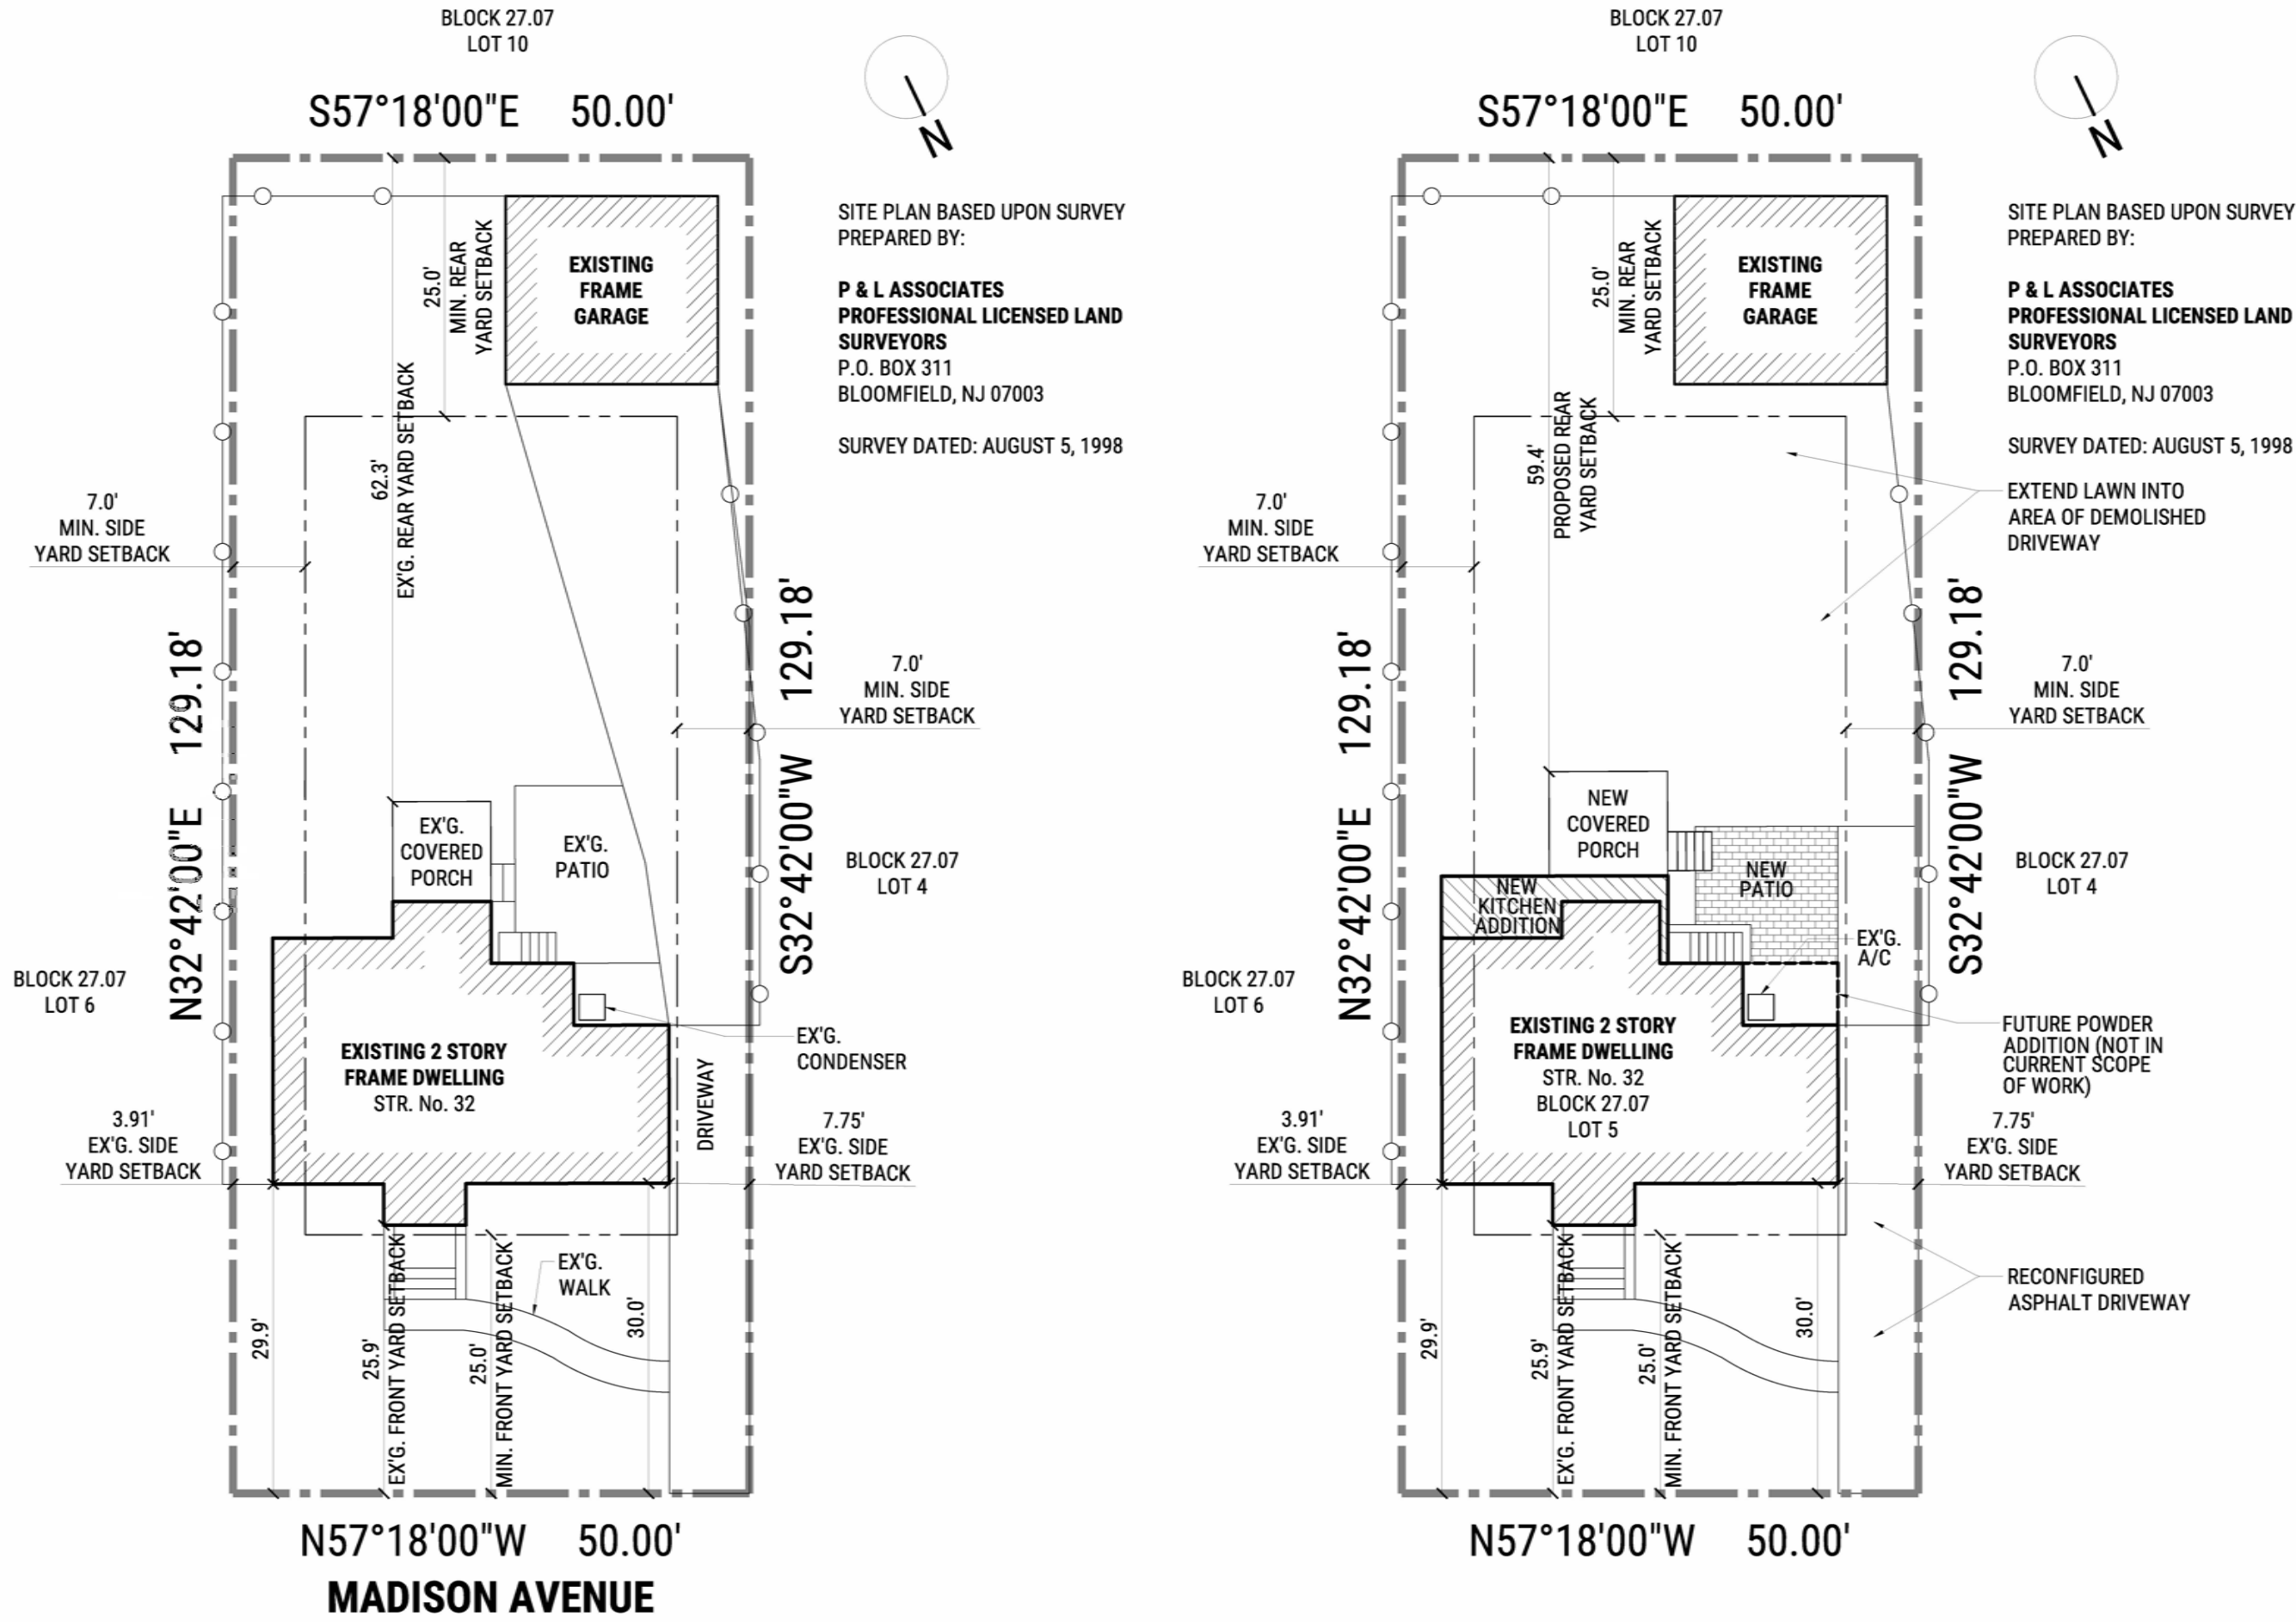

1 EXISTING SITE PLAN
SCALE: 1/16" = 1'-0"

2 PROPOSED SITE PLAN
SCALE: 1/16" = 1'-0"



3 LOCATION MAP
A000 NTS

ZONING ANALYSIS

MUNICIPALITY:	MAPLEWOOD, NJ
BLOCK:	27.07
LOT:	5
OWNER:	ERIC & LISA SCHNORR 32 MADISON AVENUE MAPLEWOOD, NJ, 07040
ZONING DISTRICT:	R-1-5

BULK REQUIREMENTS	REQUIRED	EXISTING	PROPOSED	COMPLIANCE
LOT AREA [SF]	5,000	6,459	NO CHANGE	COMPLIES
SITE WIDTH [FT]	50.0	50.0	NO CHANGE	COMPLIES
SITE DEPTH [FT]	NR	129.18	NO CHANGE	COMPLIES
FRONT YARD [FT]	25.0	25.9	NO CHANGE	COMPLIES
SIDE YARD (EACH) [FT]	7	3.91 / 7.75	NO CHANGE	EXISTING NON-CONFORMANCE / VARIANCE GRANTED ON 11/3/2025
SIDE YARD, COMBINED [% OF LOT WIDTH]	25%	23.3%	NO CHANGE	EXISTING NON-CONFORMANCE / VARIANCE GRANTED ON 11/3/2025
REAR YARD [FT]	25.0	62.3	59.4	COMPLIES
REAR YARD [% OF LOT DEPTH]	25%	48.2%	46.0%	COMPLIES
CURB CUT [% OF LOT WIDTH]	24% MAX.	15.6%	NO CHANGE	COMPLIES
BUILDING COVERAGE [% LOT AREA]	30%	20.8%	23.7%	COMPLIES
LOT COVERAGE [% LOT AREA]	45%	45.8%	36.7%	COMPLIES
FRONT YARD % PAVED [% FRONT YARD AREA]	30%	26.5%	NO CHANGE	COMPLIES
MAX. BLDG. HEIGHT [FT]	35.0	27.3	NO CHANGE	COMPLIES
MAX. BLDG. HEIGHT [STORIES]	2.0	2.0	NO CHANGE	COMPLIES
EAVE HEIGHT [FT]	24.0	20.1	NO CHANGE	COMPLIES
FRONT FAÇADE WIDTH	75% OF LOT WIDTH OR 40', WHICHEVER IS LESS	76.6%	NO CHANGE	EXISTING NON-CONFORMANCE

NOTES:

BUILDING COVERAGE CALCULATION

	MAXIMUM	EXISTING	PROPOSED
MAIN DWELLING		879	879
NEW KITCHEN ADDITION			93
FUTURE POWDER ROOM ADDITION			55
EX'G. COVERED PORCH		92	0
NEW COVERED PORCH & STEPS			131
EX'G. DETACHED GARAGE		374	374
TOTAL BUILDING COVERAGE [SF]	1,938	1,345	1,532
TOTAL BUILDING COVERAGE [%]		20.8%	23.7%
COVERAGE REMAINING [SF]		593	406

LOT COVERAGE CALCULATION

	MAXIMUM	EXISTING	PROPOSED
MAIN DWELLING		879	879
NEW KITCHEN ADDITION			100
FUTURE POWDER ROOM ADDITION			55
EX'G. COVERED PORCH		92	0
NEW COVERED PORCH & STEPS			131
EX'G. DETACHED GARAGE		374	374
EX'G. FRONT STEPS		57	57
EX'G. REAR PATIO		208	0
NEW PERVIOUS PATIO			156
EX'G. A/C CONDENSER		6	0
EX'G. FRONT WALKWAY		86	86
EX'G. REAR STEPS		22	0
NEW REAR STEPS			30
EX'G. ASPHALT DRIVEWAY		1,235	0
RECONFIGURED ASPHALT DRIVEWAY			501
TOTAL LOT COVERAGE [SF]	2,907	2,959	2,369
TOTAL LOT COVERAGE [%]		45.8%	36.7%
COVERAGE REMAINING		-52	538

MRVN

ARCHITECT
MRVN ARCHITECTURE, LLC
307 BLOOMFIELD AVENUE
SUITE 201
CALDWELL, NJ 07006
T. 646.470.2221
www.mrvnarch.com

ISSUANCES

CLIENT REVIEW	2025.12.04
CLIENT REVIEW	2026.01.16
ISSUED FOR BID	2026.01.22

PROJECT NAME
SCHNORR RESIDENCE
35 MADISON AVENUE
MAPLEWOOD, NJ 07040

SHEET NUMBER
A000
SITE PLAN & ZONING INFORMATION

ARCHITECT OF RECORD
MICHAEL J. MARVIN, JR., RA
NJ - 21A102024400

CONSTRUCTION

1. ALL WORK IS TO CONFORM WITH THE REQUIREMENTS OF ALL LOCAL, STATE, AND FEDERAL REGULATIONS PERTAINING TO BUILDING DESIGN AND CONSTRUCTION.

2. ALL WORK SHALL BE IN ACCORDANCE WITH BEST TRADE PRACTICES. THE ARCHITECT RESERVES THE RIGHT TO REVIEW THE QUALITY OF ALL WORK AND, IF NECESSARY, RECOMMEND THAT THE OWNER REQUIRE THE CONTRACTOR TO MAKE CHANGES TO THE WORK TO BRING IT'S QUALITY TO A LEVEL CONSISTENT WITH BEST TRADE PRACTICES.

3. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE COMPLETION OF ALL WORK SHOWN ON THESE CONTRACT DOCUMENTS UNLESS NOTED OTHERWISE. THE CONTRACTOR MAY NOT ALTER OR OMIT ANY WORK THAT IS SHOWN IN THESE DOCUMENTS WITHOUT NOTIFYING AND OBTAINING WRITTEN APPROVAL FROM THE ARCHITECT, REGARDLESS OF WHETHER SUCH OMISSION OR REVISION IS MADE IN THE CONTRACTOR'S CONTACT WITH THE OWNER.

4. BUILDING CODES ARE THE MINIMUM ACCEPTABLE LEVEL OF QUALITY PERMITTED BY LAW. IN SOME CASES, THE REQUIREMENTS OF THESE CONTRACT DOCUMENTS EXCEED THE REQUIREMENTS OF THE PREVAILING CODE IN ORDER TO PROVIDE A BETTER PERFORMING, HIGHER QUALITY BUILDING.

5. THE ARCHITECT SHALL RECEIVE DIGITAL COPIES OF THE FINAL CONTRACT FOR CONSTRUCTION BETWEEN THE CONTRACTOR AND THE OWNER WITHIN (1) DAY OF SIGNING OF THE CONTRACT.

6. IN USING THESE CONTRACT DOCUMENTS AND SIGNING ANY CONTRACT FOR CONSTRUCTION WITH THE OWNER, THE CONTRACTOR AGREES TO EXECUTE THE WORK FOLLOWING THE PROCEDURES DEFINED IN AIA DOCUMENT A191-2021 - STANDARD FORM OF AGREEMENT BETWEEN OWNER AND CONTRACTOR, AND AIA DOCUMENT A201-2017 - GENERAL CONDITIONS OF THE CONTRACT FOR CONSTRUCTION. SAMPLE EXHIBITS OF THESE DOCUMENTS ARE AVAILABLE FROM THE ARCHITECT UPON WRITTEN REQUEST.

7. THE SCOPE OF WORK, LANGUAGE, AND PROVISIONS LISTED IN THESE CONTRACT DOCUMENTS SHALL NOT BE MODIFIED BY ANY OTHER AGREEMENT BETWEEN THE OWNER AND CONTRACTOR. IN THE EVENT THAT THERE IS ANY DISCREPANCY IN THE SCOPE, ALLOWANCES, ALTERNATES, OR ANY OTHER ASPECT OF THE WORK, THE CONTRACT DOCUMENTS SHALL BE CONSIDERED THE FINAL AND ACCURATE SOURCE OF INFORMATION.

8. THE CONTRACTOR SHALL GIVE ALL NOTICES, OBTAIN ALL PERMITS, LICENSES, AND CERTIFICATES OF INSPECTION, OF APPROVAL, AND OF OCCUPANCY. THE CONTRACTOR SHALL BE REQUIRED TO PAY ALL COSTS AND FEES FOR THESE ITEMS. PERMIT FEES SHALL BE FACTORED INTO THE CONTRACTOR'S BID PRICE.

9. WHERE APPLICABLE, THE CONTRACTOR SHALL MAKE ALL NECESSARY ARRANGEMENTS FOR THE CONNECTIONS OF UTILITIES AND SHALL PAY THE CHARGES FOR THEM.

10. EXCEPT WHERE NOTED OTHERWISE, THE CONTRACTOR SHALL GUARANTEE ALL WORK AGAINST DEFECTS FOR A MINIMUM OF ONE (1) YEAR FROM THE DATE OF SUBSTANTIAL COMPLETION. IN THE CONTRACTOR SHALL BE RESPONSIBLE FOR ANY NECESSARY REPAIRS OR CORRECTIONS WITHIN THE ONE (1) YEAR TIME PERIOD, UP TO AND INCLUDING REPAIR OF ALL DAMAGES ARISING FROM THE FAILURE OF THE WORK.

11. ALL DIMENSIONS SHOWN ON THE DOCUMENTS MUST BE VERIFIED BY THE CONTRACTOR AT THE SITE PRIOR TO COMMENCEMENT OF ANY WORK OR ORDERING OF ANY MATERIALS. ANY DISCREPANCIES SHALL BE REPORTED TO THE ARCHITECT IMMEDIATELY. ARCHITECT RESERVES THE RIGHT TO ORDER WORK COMPLETED WITH VERIFICATION OF DIMENSIONS AND/OR CONSULTATION REMOVED AND REDONE. COST OF REMOVAL AND RECONSTRUCTION SHALL BE BOURNE BY THE CONTRACTOR AND/OR THEIR SUB-CONTRACTOR. NO CHANGES TO THE PLANS ARE PERMITTED WITHOUT WRITTEN CONSENT OF THE ARCHITECT. DO NOT MEASURE OFF DRAWINGS. WRITTEN DIMENSIONS ALWAYS PREVAIL.

12. MINOR DETAILS NOT USUALLY SHOWN OR SPECIFIED, BUT NECESSARY FOR PROPER AND ACCEPTABLE CONSTRUCTION, INSTALLATION, OR OPERATION OF ANY PART OF THE WORK, AS DETERMINED BY THE ARCHITECT, STANDARDS OF GOOD WORKMANSHIP, AND/OR BEST TRADE PRACTICES, SHALL BE INCLUDED IN THE WORK AS THOUGH THEY WERE SPECIFIED IN THE CONTRACT DOCUMENTS.

13. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE PROTECTION OF ALL EXISTING AND NEW CONDITIONS AND MATERIALS WITHIN AND ADJACENT TO THE CONSTRUCTION SITE.

14. THE CONTRACTOR SHALL KEEP THE WORK SITE FREE FROM DEBRIS AND ACCUMULATED REFUSE AND SHALL HAVE SOLE RESPONSIBILITY FOR PROTECTING ALL DANGEROUS AREAS FROM ENTRY BY UNAUTHORIZED PARTIES. THE CONTRACTOR SHALL BE SOLELY RESPONSIBLE FOR ALL SITE SAFETY MEASURES.

15. AT THE CONCLUSION OF EACH WORK DAY, THE CONTRACTOR SHALL LEAVE THE WORK AREA "BROOM-CLAN" AND SHALL SECURE DIRT, REFUSE, AND DEBRIS FROM BEING BLOWN OFF THE PROJECT SITE. THE CONTRACTOR SHALL BE RESPONSIBLE FOR SWEEPING ALL VEHICLE DRIVE AREAS CLEAN AT THE END OF THE WORK DAY. UPON REMOVAL OF DUMPSTERS AND OTHER WASTE RECEPTABLES FROM THE PROJECT SITE, THE CONTRACTOR SHALL SWEEP THE AREA OF THE WASTE RECEPTABLES TO ENSURE THAT NO MATERIAL (PARTICULARLY NAILS, SCREWS, ETC.) HAVE ESCAPED FROM THE RECEPTACLE.

16. THE CONTRACTOR SHALL BE AWARE OF AN RESPECT ALL NOISE ORDINANCES AND REGULATIONS. CONSTRUCTION WORK MUST BE RESPECTFUL OF NEIGHBORS AND NOT DISRUPTIVE TO THE DAY TO DAY ACTIVITY OF THE SURROUNDING NEIGHBORHOOD.

17. UPON COMPLETION OF THE WORK, THE CONTRACTOR SHALL CLEAN THE ENTIRE PROJECT AND THE SITE SHALL BE LEFT IN A CLEAN CONDITION. THIS INCLUDES, BUT IS NOT LIMITED TO:

- 17.1. COMPLETE SWEEPING OF ALL HARDSCAPE AREAS AND REMOVAL OF ALL RUBBISH AND DEBRIS.
- 17.2. REMOVAL OF ALL STAINS AND/OR PAINT FROM GLASS, HARDWARE, FINISHED FLOORING, CABINETS, DECKING, ETC.
- 17.3. RESTORATION OF PROPERTY BY FILLING ALL RUTS W/ RAKED TOPSOIL.
- 17.4. REPAIRING ANY DAMAGED ASPHALT PAVING OR CRACKED CONCRETE.

18. THE CONTRACT DOCUMENTS ARE INSTRUMENTS OF SERVICE AND ARE THE PROPERTY OF THE ARCHITECT. NO INSTRUMENTS OF SERVICE AND MAY BE REUSED WITHOUT WRITTEN PERMISSION OF THE ARCHITECT. THE ARCHITECT GRANTS TO THE OWNER A NONEXCLUSIVE LICENSE TO USE THE INSTRUMENTS OF SERVICE SOLELY AND EXCLUSIVELY FOR THE PURPOSES OF CONSTRUCTING, USING, AND MAINTAINING THE PROJECT. THE ARCHITECT MAY TERMINATE THE LICENSE TO USE THESE INSTRUMENTS OF SERVICE FOR ANY OR NO REASON AND THE OWNER AND CONTRACTOR SHALL RETURN ALL ORIGINAL AND REPRODUCED VERSIONS IN THEIR POSSESSION TO THE ARCHITECT WITHIN (7) BUSINESS DAYS OF TERMINATION.

DEMOLITION NOTES

1. G.C. SHALL BE RESPONSIBLE FOR ALL DEMOLITION AND DISPOSAL ON THE PROJECT SITE.

2. DURING DEMOLITION, CONTRACTOR SHALL FOLLOW ALL OSHA, EPA, STATE AND LOCAL REGULATIONS REQUIRED FOR DEMOLITION.

3. EPA REGULATIONS UNDER NATIONAL EMISSION STANDARDS FOR HAZARDOUS AIR POLLUTANTS (NESHAD), 40 CFR61, PART M REQUIRE THE OWNER TO KNOW THE EXTENT OF LEAD AND ASBESTOS AT THE FACILITY PRIOR TO THE START OF WORK. THE CONTRACTOR SHALL REVIEW THE PROPERTY AND RETAIN A LEAD AND ASBESTOS ABATEMENT CONTRACTOR TO TEST SUSPECTED LEAD OR ASBESTOS CONTAINING MATERIALS PRIOR TO COMMENCING DEMOLITION WORK. IF CONTAMINATED MATERIALS ARE FOUND, G.C. SHALL BE RESPONSIBLE FOR REMOVAL OF ALL CONTAMINANTS PRIOR TO DEMOLITION IN ACCORDANCE WITH APPLICABLE REGULATIONS. A LICENSED LEAD AND ASBESTOS CONTRACTOR SHALL COORDINATE THE WORK, PROVIDE SCHEDULE, AND ADMINISTER PAPERWORK WITH THE GENERAL CONTRACTOR FOR THE SURVEY/INSPECTION REPORT.

4. CONTRACTOR SHALL REPORT TO THE OWNER AND ARCHITECT FOR INSTRUCTIONS IF THERE IS ANY MOLD FOUND DURING INVESTIGATION PRIOR TO ANY DEMOLITION.


5. G.C. SHALL SEPARATE GENERAL CONSTRUCTION WASTE BOUND FOR LANDFILL FROM SALVAGEABLE OR RECYCLABLE MATERIALS. OWNER SHALL BE PROVIDED WITH A CREDIT FOR ANY SALVAGED OR RECYCLED MATERIALS. G.C. SHALL PRESENT RECEIPTS / INVOICES FOR WASTE DISPOSAL / SALVAGE / RECYCLING TO ARCHITECT AND OWNER UPON REQUEST.

6. SPECIAL CARE SHALL BE TAKEN TO ENSURE THE NO DAMAGE OCCUR TO AREAS OF THE HOUSE NOT TAGGED FOR DEMOLITION.

7. SPECIAL CARE SHALL BE TAKEN TO PREVENT DIRT, DUST AND DEBRIS FROM ENTERING AREAS OF THE BUILDING OUTSIDE THE AREA OF WORK. WORK AREAS SHALL BE SEPARATED

- A001**

ISSUANCES	
CLIENT REVIEW	2025.12.04
CLIENT REVIEW	2026.01.16
ISSUED FOR BID	2026.01.22

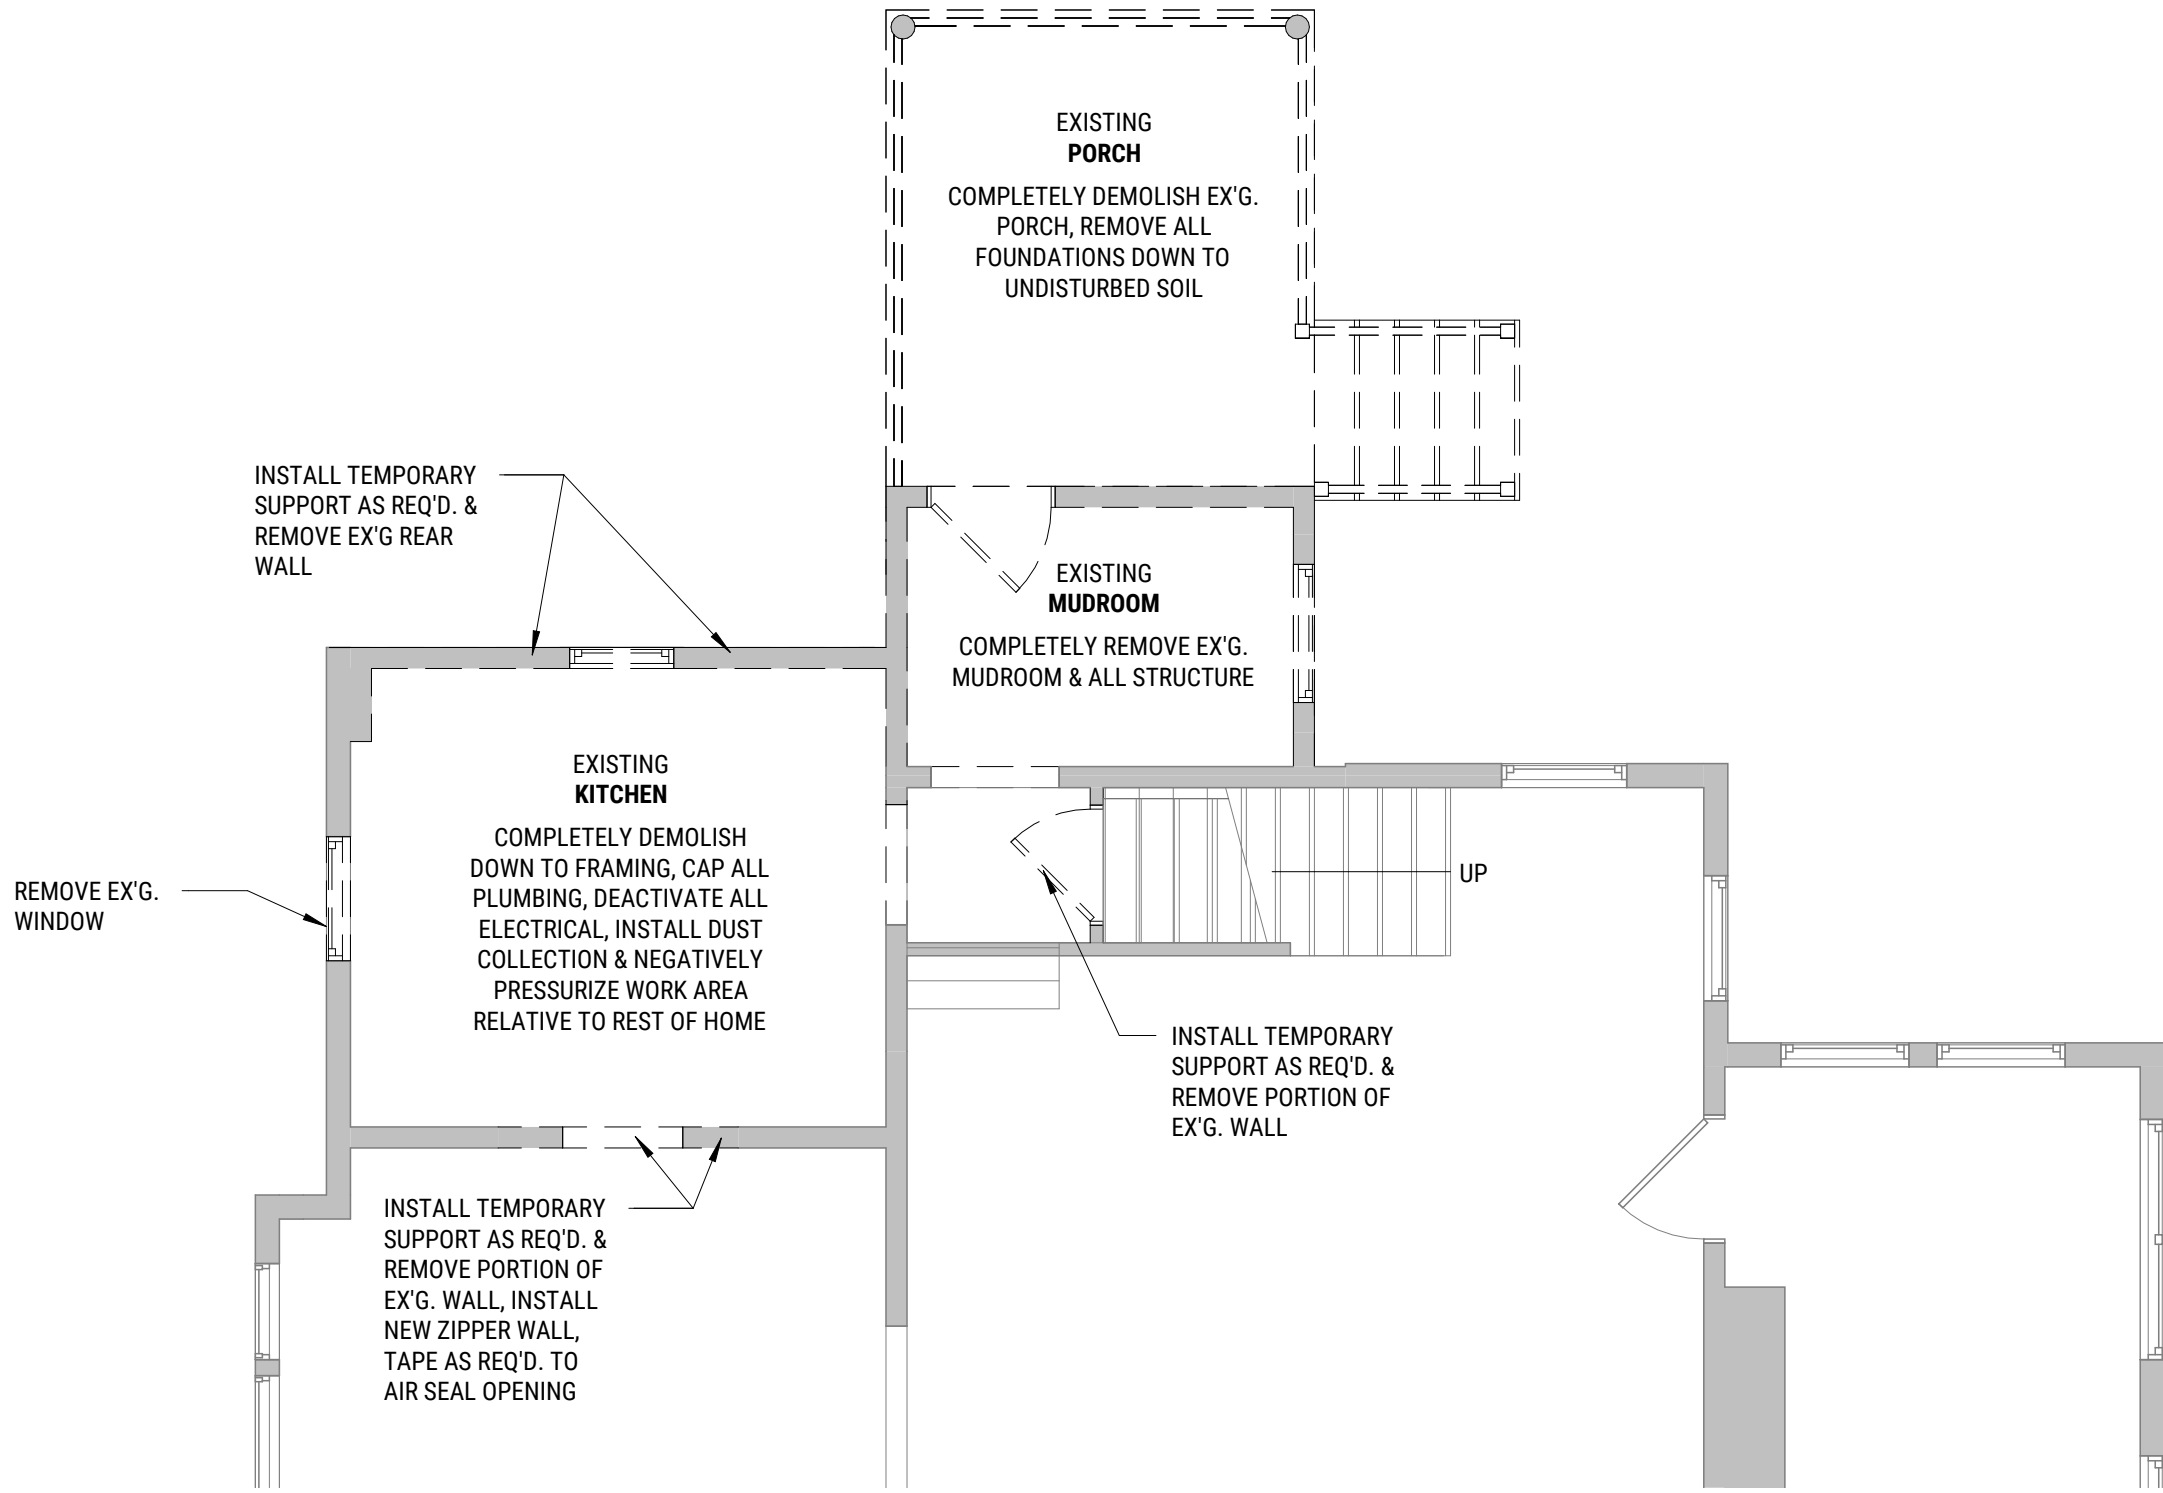

1


DEMOLITION PLAN - LEVEL 1

A050

1/4" = 1'-0"

EXISTING SUMP PUMP NOTE

EXISTING BASEMENT SUMP PUMP DISCHARGES THROUGH AREA OF NEW FOUNDATION EXCAVATION. GC TO DISCONNECT EXISTING SUMP & REROUTE TEMPORARY PIPING TO ALLOW PROPER OPERATION OF SUMP PUMP DURING ALL CONSTRUCTION ACTIVITIES. GC SHALL INSTALL NEW PERMANENT SUMP PUMP DRAIN LINE DISCHARGING INTO BACKYARD PRIOR TO COMPLETION OF CONSTRUCTION. COORDINATE FINAL LOCATION OF DRAIN W/ ARCHITECT & OWNER IN FIELD.

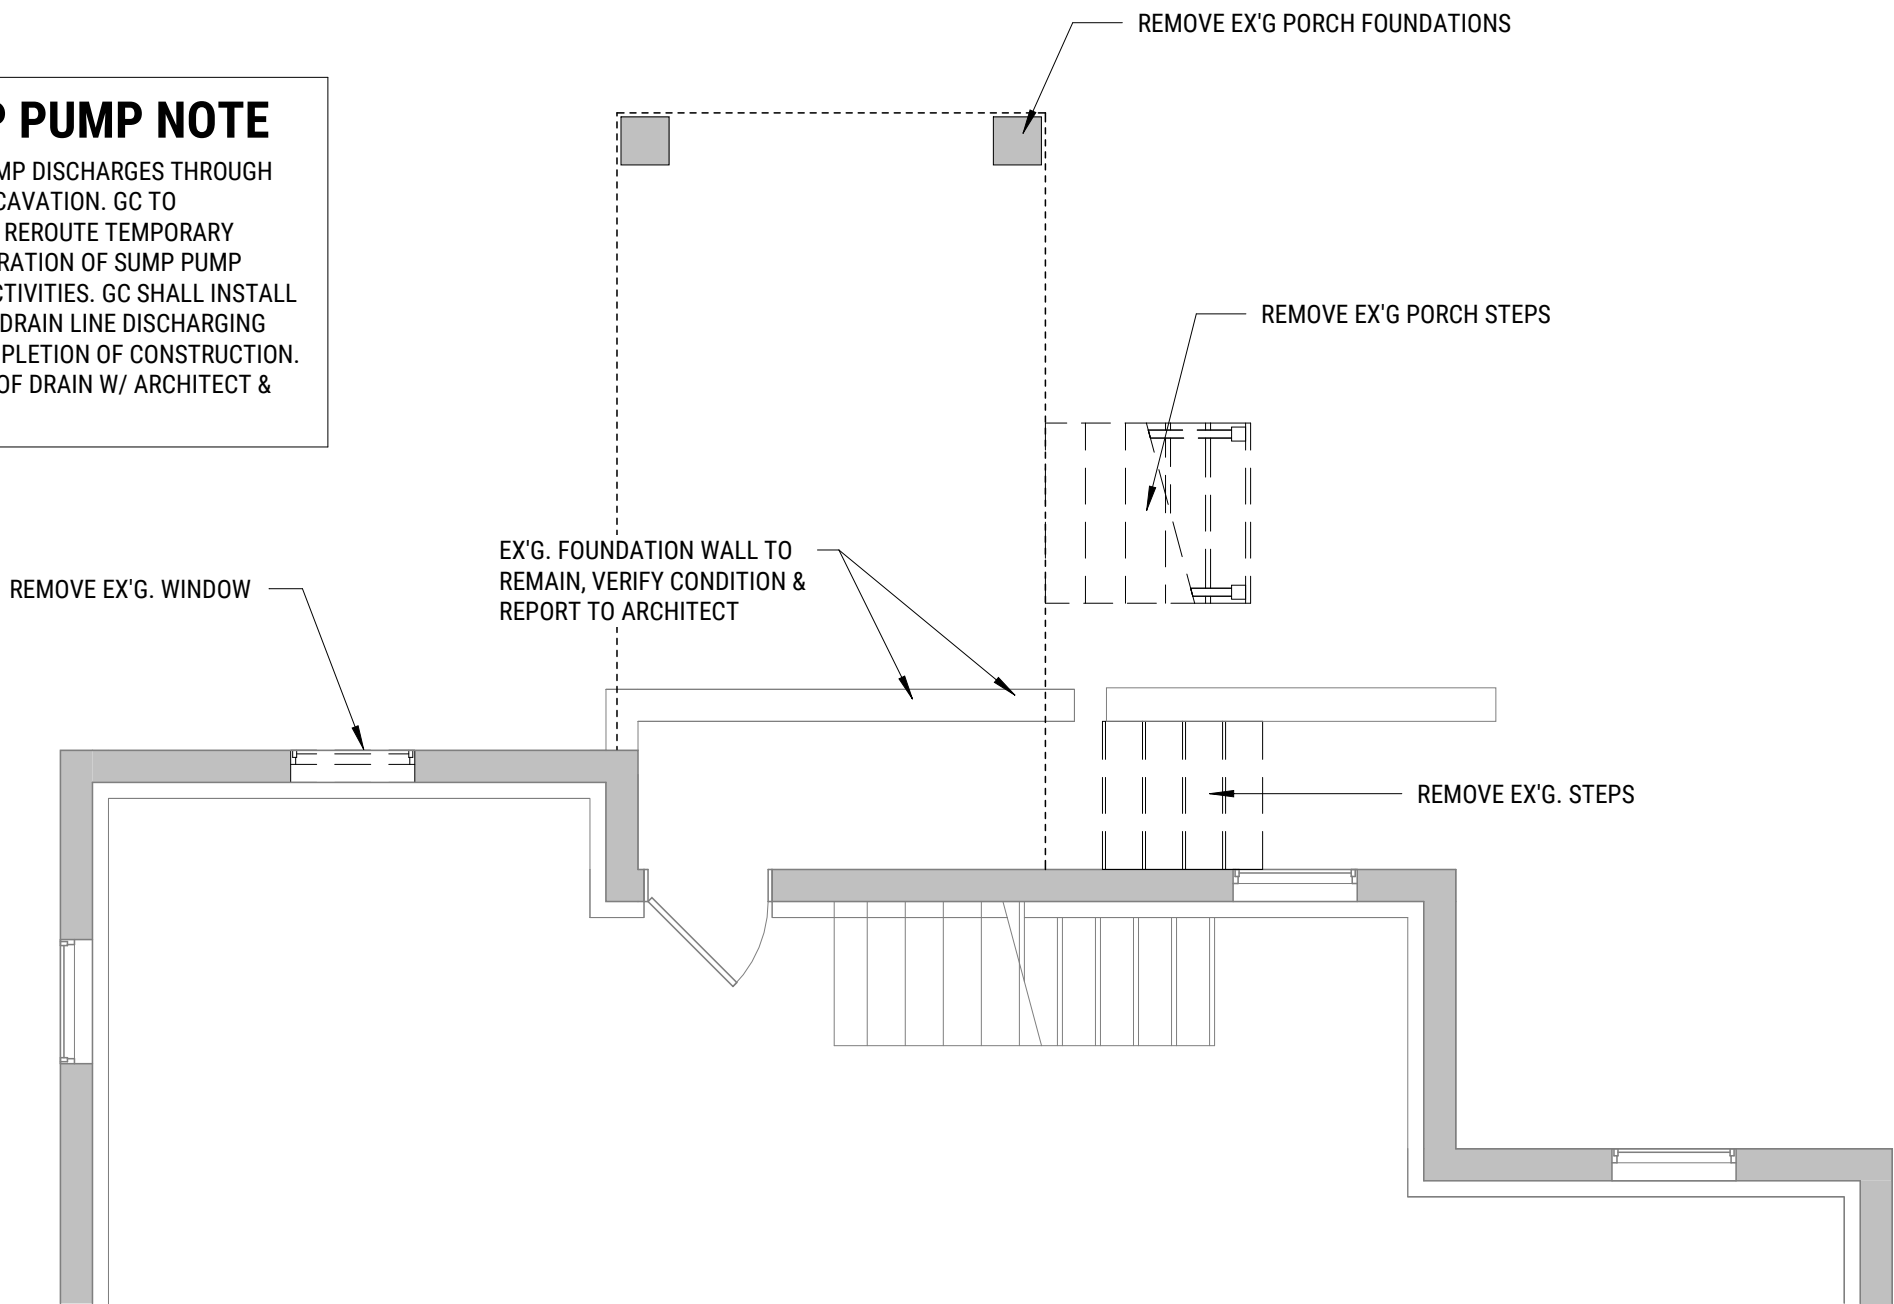


2

DEMOLITION PLAN - BASEMENT

A050

1/4" = 1'-0"


SCHEMATIC DESIGN	2025.06.18
SCHEMATIC DESIGN 2	2025.06.27
DESIGN DEVELOPMENT	2025.08.01
VARIANCE SUBMISSION	2025.09.10
CLIENT REVIEW	2025.12.04
CLIENT REVIEW	2026.01.16
ISSUED FOR BID	2026.01.22

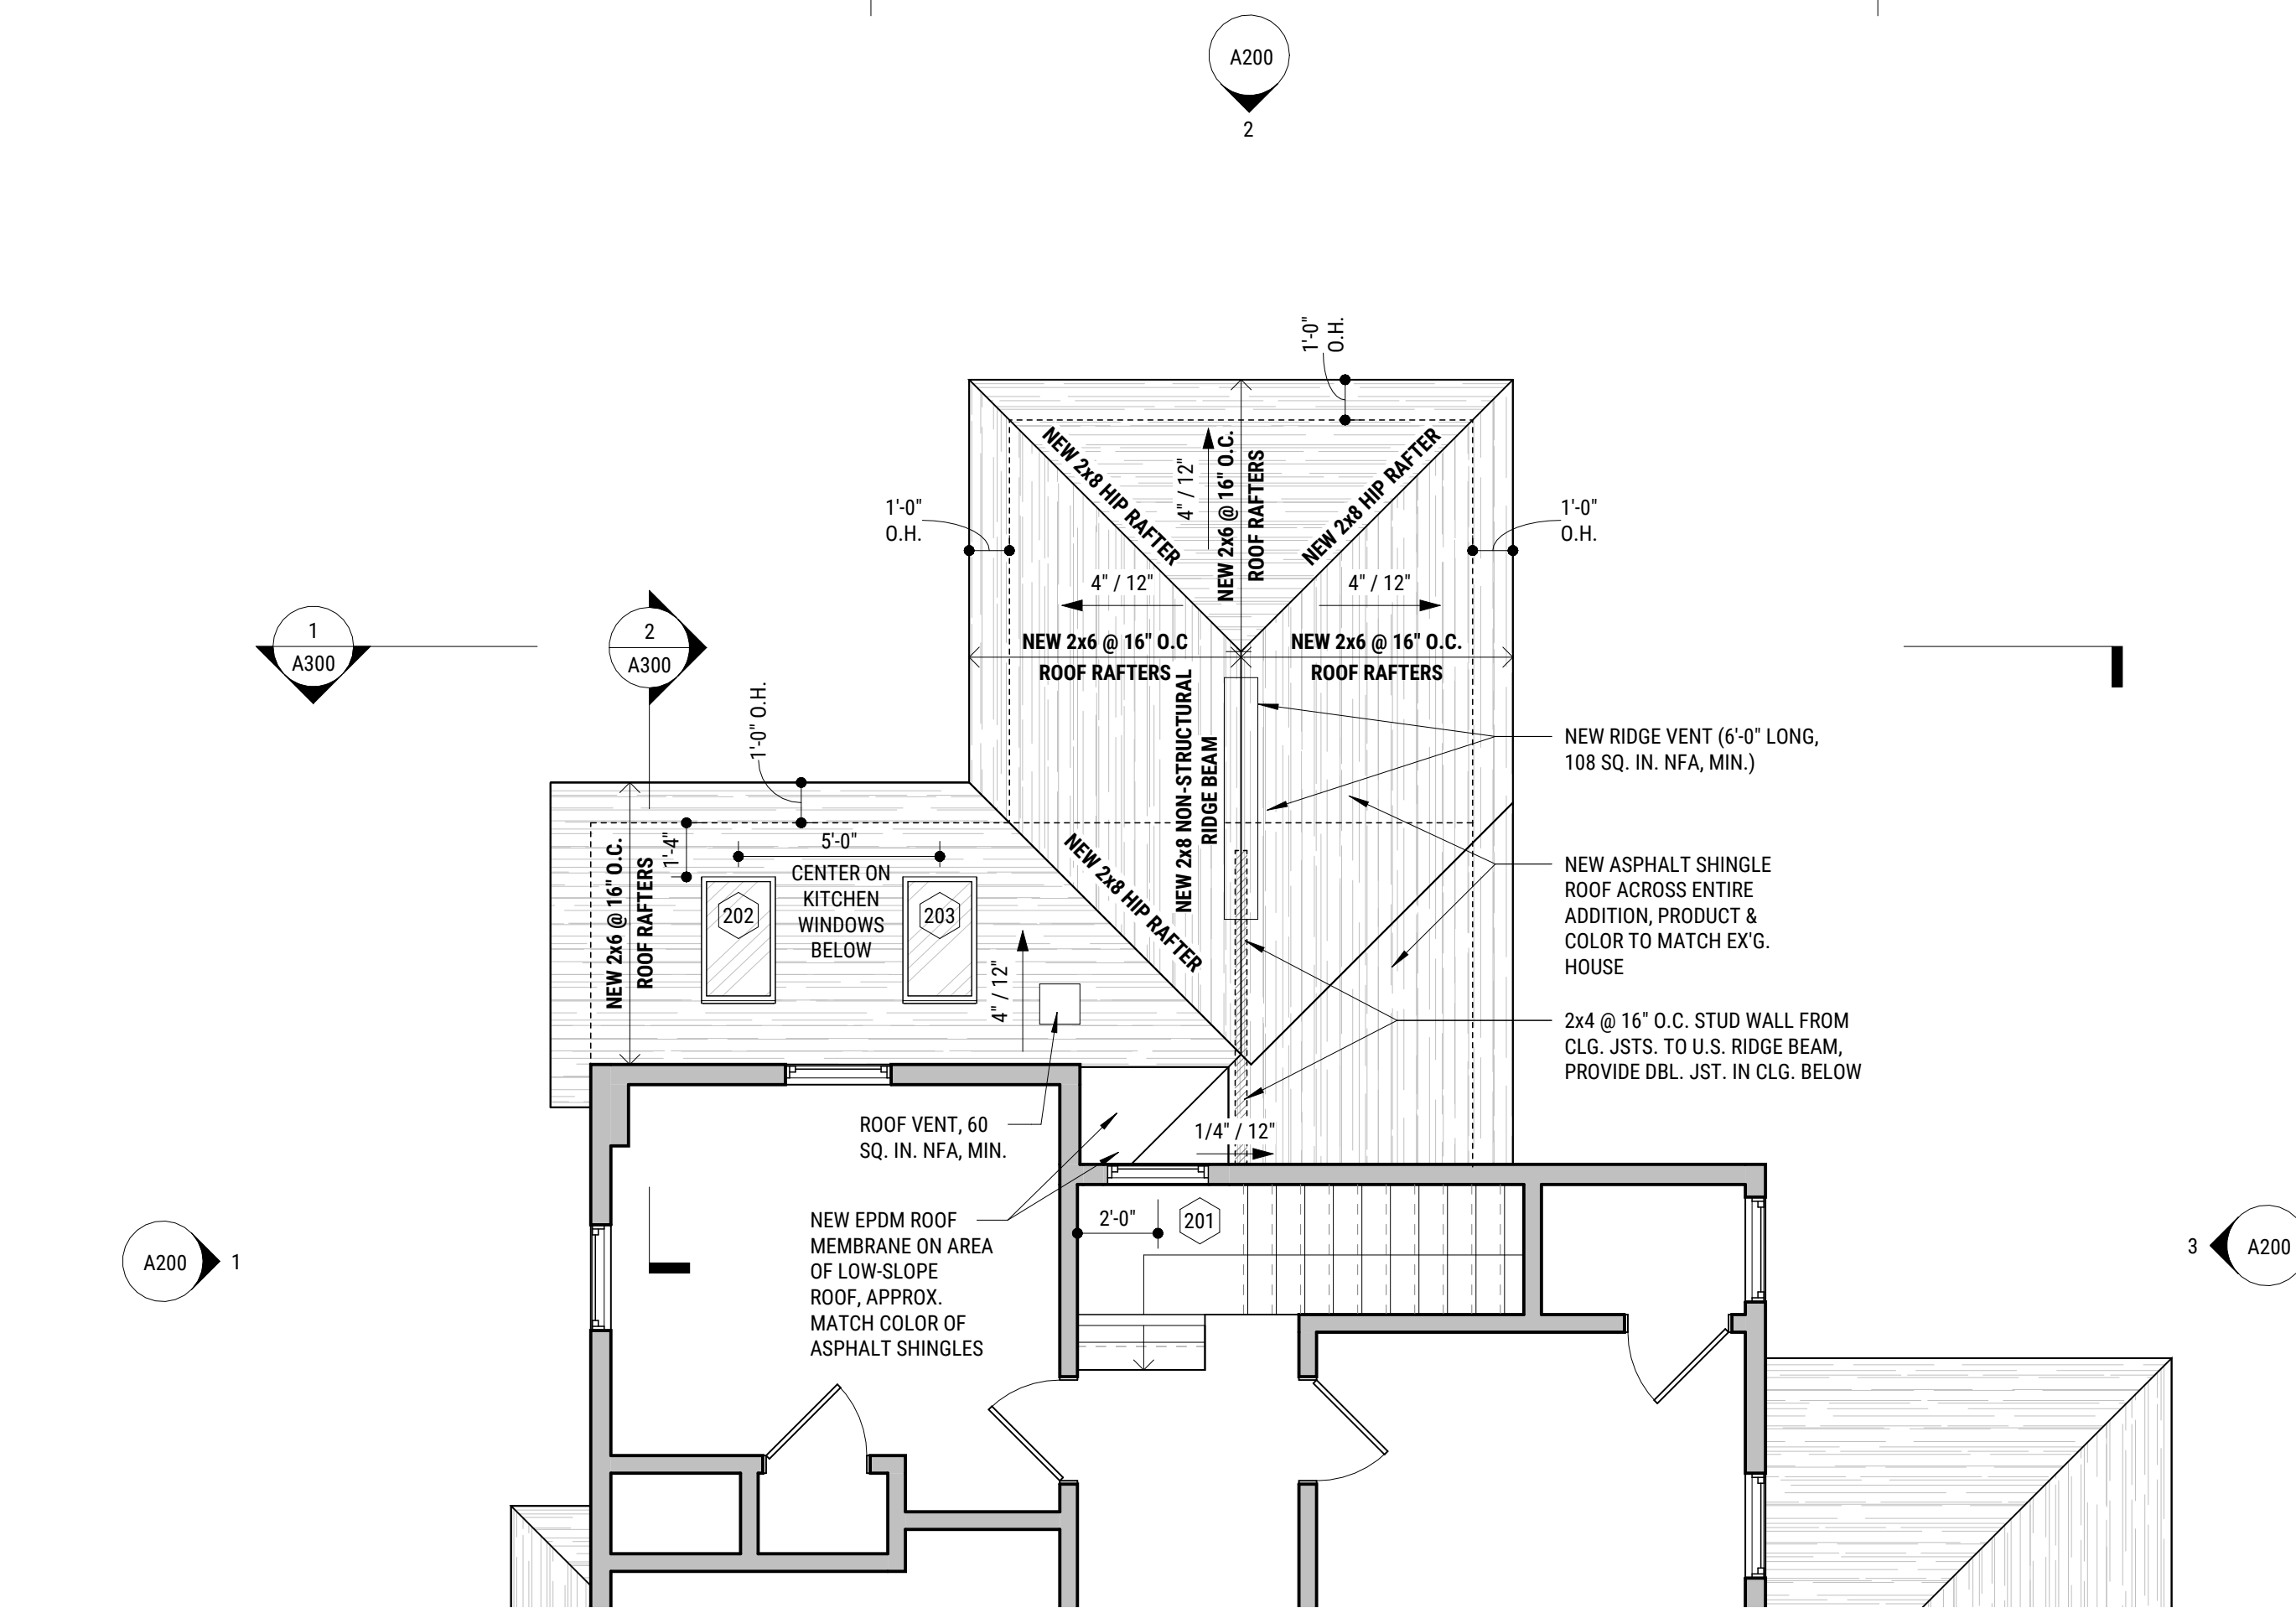


3 CONSTRUCTION PLAN - LEVEL 2
1/4" = 1'-0"

EXISTING SUMP PUMP NOTE

EXISTING BASEMENT SUMP PUMP DISCHARGES THROUGH AREA OF NEW FOUNDATION EXCAVATION. GC TO DISCONNECT EXISTING SUMP & REROUTE TEMPORARY PIPING TO ALLOW PROPER OPERATION OF SUMP PUMP DURING ALL CONSTRUCTION ACTIVITIES. GC SHALL INSTALL NEW PERMANENT SUMP PUMP DRAIN LINE DISCHARGING INTO BACKYARD PRIOR TO COMPLETION OF CONSTRUCTION. COORDINATE FINAL LOCATION OF DRAIN W/ ARCHITECT & OWNER IN FIELD.

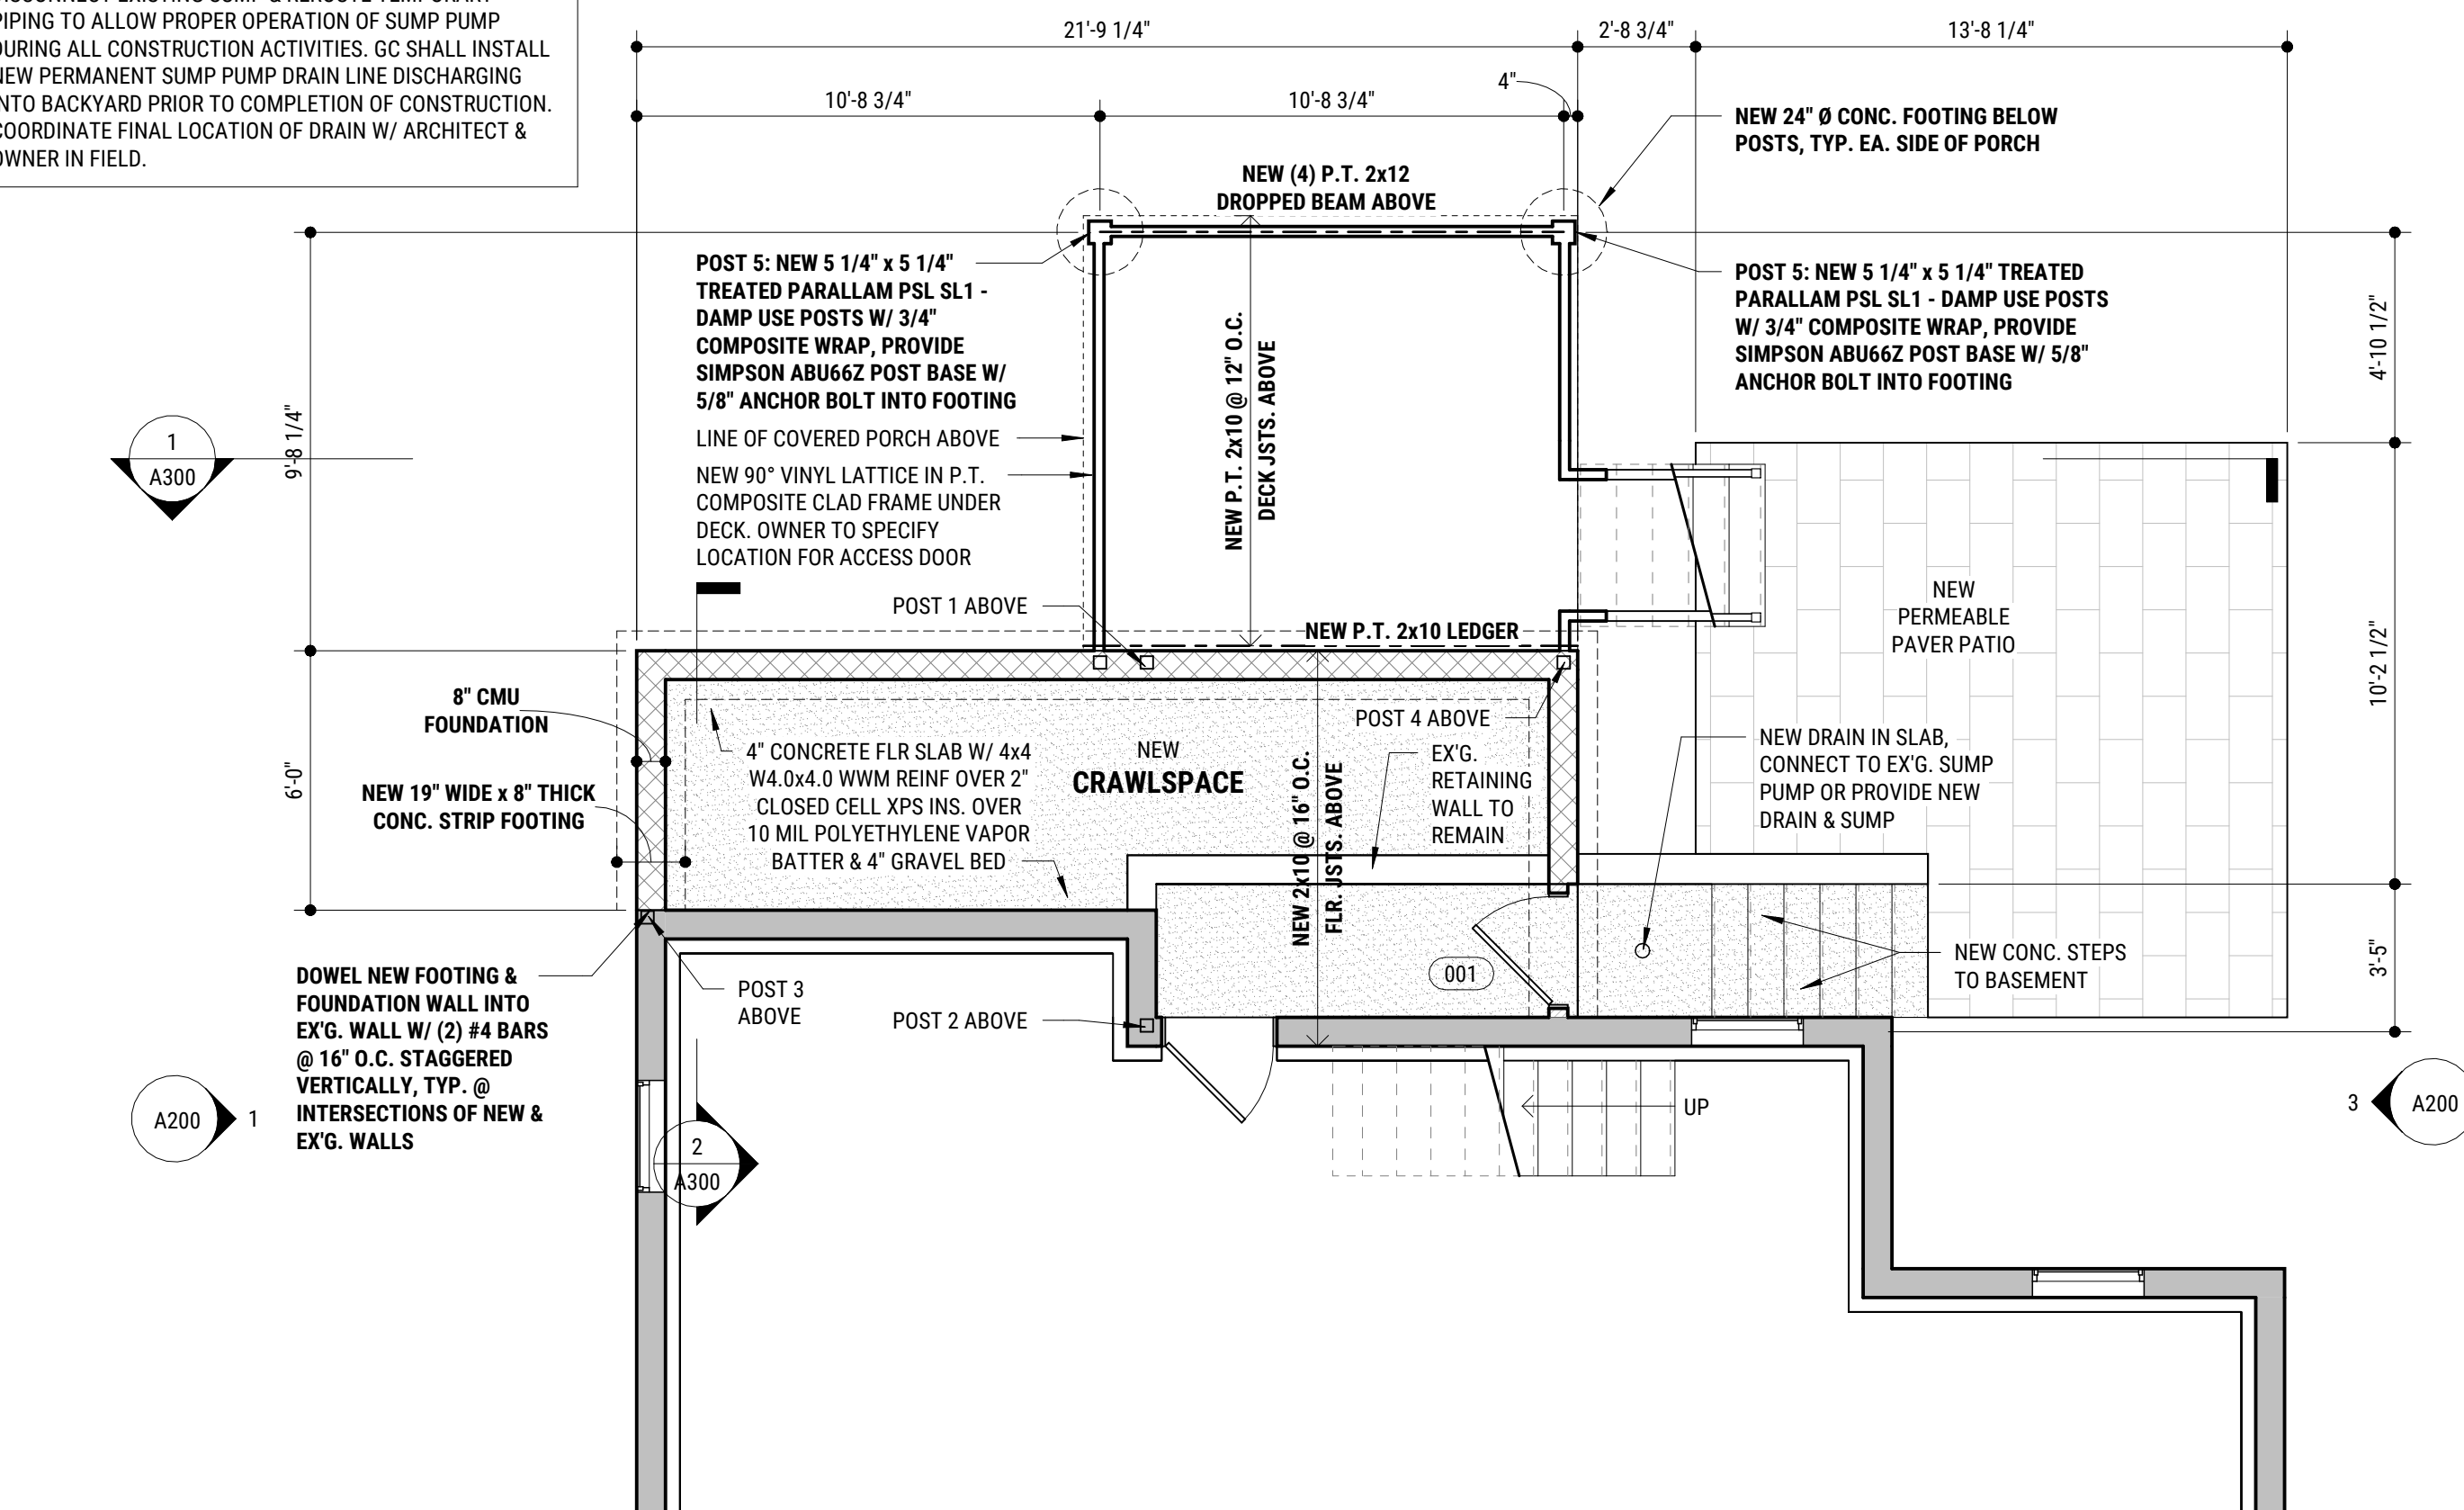

2 CONSTRUCTION PLAN - BASEMENT
1/4" = 1'-0"

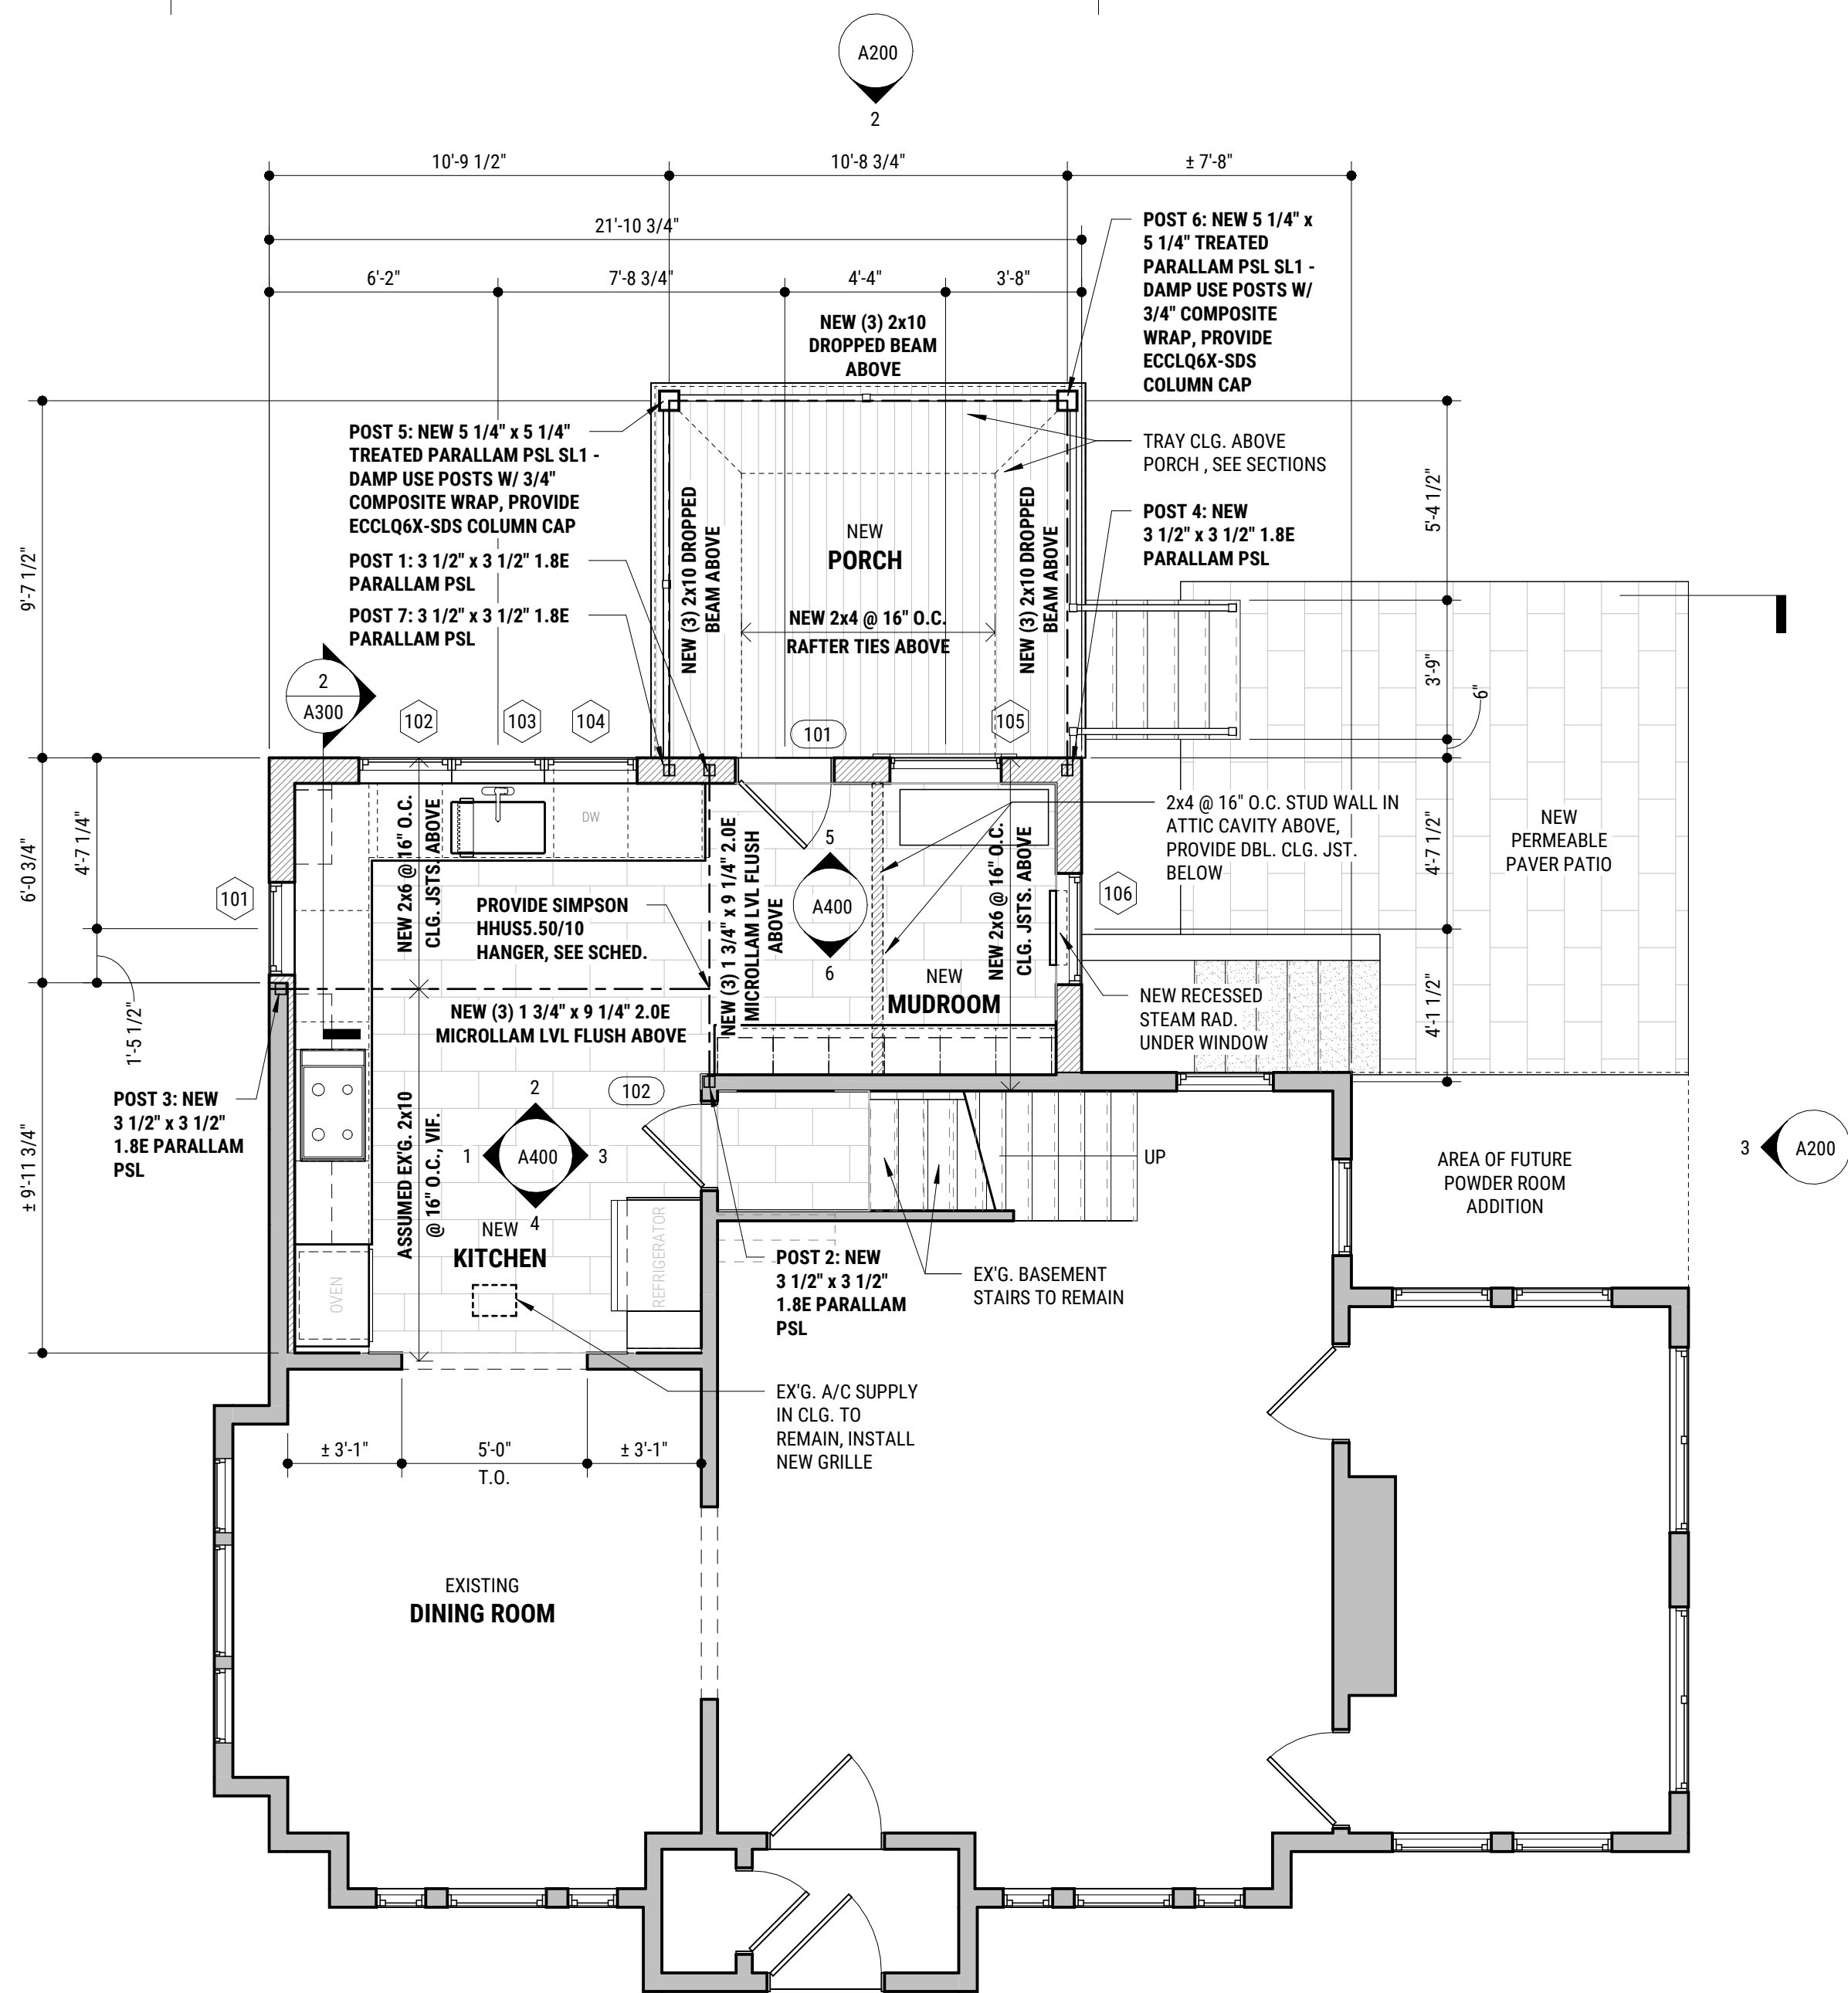

1 CONSTRUCTION PLAN - LEVEL 1
1/4" = 1'-0"

HANGER SCHEDULE


HANGER USE	HANGER MANUF.	HANGER TYPE	HANGER WIDTH	HANGER HEIGHT	HANGER BEARING	HANGER FACE FASTENERS	HANGER JOIST FASTENERS
KITCHEN GIRDER	SIMPSON	HHUS5.50/10	5 1/2"	9"	3"	(30) 0.162 x 3 1/2	(10) 0.162 x 3 1/2
2x4	SIMPSON	LUS24	1 9/16"	3 1/8"	1 3/4"	(4) 0.148 x 3	(2) 0.148 x 3
2x6	SIMPSON	LUS26	1 9/16"	4 3/4"	1 3/4"	(4) 0.148 x 3	(4) 0.148 x 3
(2) 2x6	SIMPSON	LUS26-2	3 1/8"	4 7/8"	2"	(4) 0.162 x 3 1/2	(4) 0.162 x 3 1/2
(3) 2x6	SIMPSON	LUS26-3	4 5/8"	4 1/8"	2"	(4) 0.162 x 3 1/2	(4) 0.162 x 3 1/2
2x8	SIMPSON	LUS28	1 9/16"	6 5/8"	1 3/4"	(6) 0.148 x 3	(4) 0.148 x 3
(2) 2x8	SIMPSON	LUS28-2	3 1/8"	4 7/8"	2"	(6) 0.162 x 3 1/2	(4) 0.162 x 3 1/2
(3) 2x8	SIMPSON	LUS28-3	4 5/8"	6 1/4"	2"	(6) 0.162 x 3 1/2	(4) 0.162 x 3 1/2
(4) 2x8	SIMPSON	HU28-4	6 1/8"	7"	2 1/2"	(14) 0.162 x 3 1/2	(6) 0.162 x 3 1/2
2x10 / 2x12	SIMPSON	LUS210	1 9/16"	7 13/16"	2"	(8) 0.148 x 3	(4) 0.148 x 3
(2) 2x10 / (2) 2x12	SIMPSON	LUS210-2	3 1/8"	9"	2"	(8) 0.162 x 3 1/2	(6) 0.162 x 3 1/2
(3) 2x10 / (3) 2x12	SIMPSON	LUS210-3	4 5/8"	8 3/16"	2"	(8) 0.162 x 3 1/2	(6) 0.162 x 3 1/2
(4) 2x10	SIMPSON	HU210-4	6 1/8"	8 3/8"	2 1/2"	(18) 0.162 x 3 1/2	(8) 0.162 x 3 1/2
(4) 2x12	SIMPSON	HGUS212-4	6 9/16"	10 5/8"	4"	(56) 0.162 x 3 1/2	(20) 0.162 x 3 1/2
"L" SHAPED PORCH COLUMN CAPS	SIMPSON	ECCLQ6X-SDS	4 5/8" / 4 5/8"	7" / 7"	±6"	PER MANUF.	PER MANUF.

NOTES

- ALL HANGERS TO BE INSTALLED TO MANUFACTURER'S SPECIFICATION. NAILS SHALL BE MANUFACTURER'S APPROVED PRODUCT. NAIL SIZES MAY NOT BE SUBSTITUTED.
- SIMPSON STRONG-DRIVE CONNECTOR SCREWS MAY BE SUBSTITUTED FOR SCHEDULED NAILS. CONTRACTOR TO SUBMIT REQUEST FOR SUBSTITUTION TO ARCHITECT IN WRITING FOR APPROVAL PRIOR TO INSTALLATION. ALL SUBSTITUTIONS TO BE PER MANUFACTURER'S SPECIFICATION.
- HANGERS SHALL BE HOT-DIPPED GALVANIZED STEEL. EXTERIOR HANGERS THAT MAY BE EXPOSED TO WATER SHALL BE Z-MAX CORROSION RESISTANT.

LIGHTING FIXTURE SCHEDULE						
MARK	TYPE	MANUFACTURER	MODEL	FINISH	LAMP	NOTES
F1	4" CANLESS RECESSED LED HIGH HAT	Cooper Lighting	HLB4	WHITE	LED	IC RATED, AIR TITE HOUSING, WET LOCATION LISTED
F2	3" CANLESS RECESSED LED HIGH HAT	Cooper Lighting	HLB3	WHITE	LED	IC RATED, AIR TITE HOUSING, WET LOCATION LISTED
F3	UNDER CABINET LINEAR DOTLESS 95+ LED STRIP LIGHT - 3000K	ASPECT LED	AL-SL195-24-3000-IP20-S28	<varies>	LED	CUTTABLE LED LIGHT STRIP, PROVIDE POWER SUPPLY & RECEPTACLES AS REQ'D. FOR SWITCHED INSTALLATION
F4	WALL MOUNTED FLUSH 5" ROUND LED LIGHT	WAC LIGHTING	FM-05RN-930-WT	WHITE	LED	SET TO 3000K TEMPERATURE
F5	48" LINEAR LED UTILITY LIGHT	LITHONIA	CLX L48 5000LM HEF WDL G210 40K 80CRI	WHITE	LED	GC TO FURNISH AND INSTALL FIXTURE AND NECESSARY ACCESSORIES FOR SWITCHED OPERATION.
FX	OWNER SUPPLIED LIGHT FIXTURE	-	-	-	-	PURCHASED BY OWNER, INSTALLED BY GC


PROVIDE 44" DIAMETER EXTERIOR RATED "KENNICOTT" CEILING FAN BY HUNTER IN "FRESH WHITE" FINISH. INSTALL TIGHT TO CEILING W/ MANUF.'S MINIMUM PERMITTED DOWNROD. FAN BLADES TO SIT MINIMUM 7'-0" ABOVE PORCH FLOOR. INSTALL WALL CONTROL AS NOTED IN PLANS.




ISSUANCES	
SCHEMATIC DESIGN	2025.06.18
DESIGN DEVELOPMENT	2025.08.01
CLIENT REVIEW	2025.12.04
CLIENT REVIEW	2026.01.16
ISSUED FOR BID	2026.01.22

ISSUANCES

SCHEMATIC DESIGN	2025.06.18
SCHEMATIC DESIGN 2	2025.06.27
DESIGN DEVELOPMENT	2025.08.01
VARIANCE SUBMISSION	2025.09.10
CLIENT REVIEW	2025.12.04
CLIENT REVIEW	2026.01.16
ISSUED FOR BID	2026.01.22

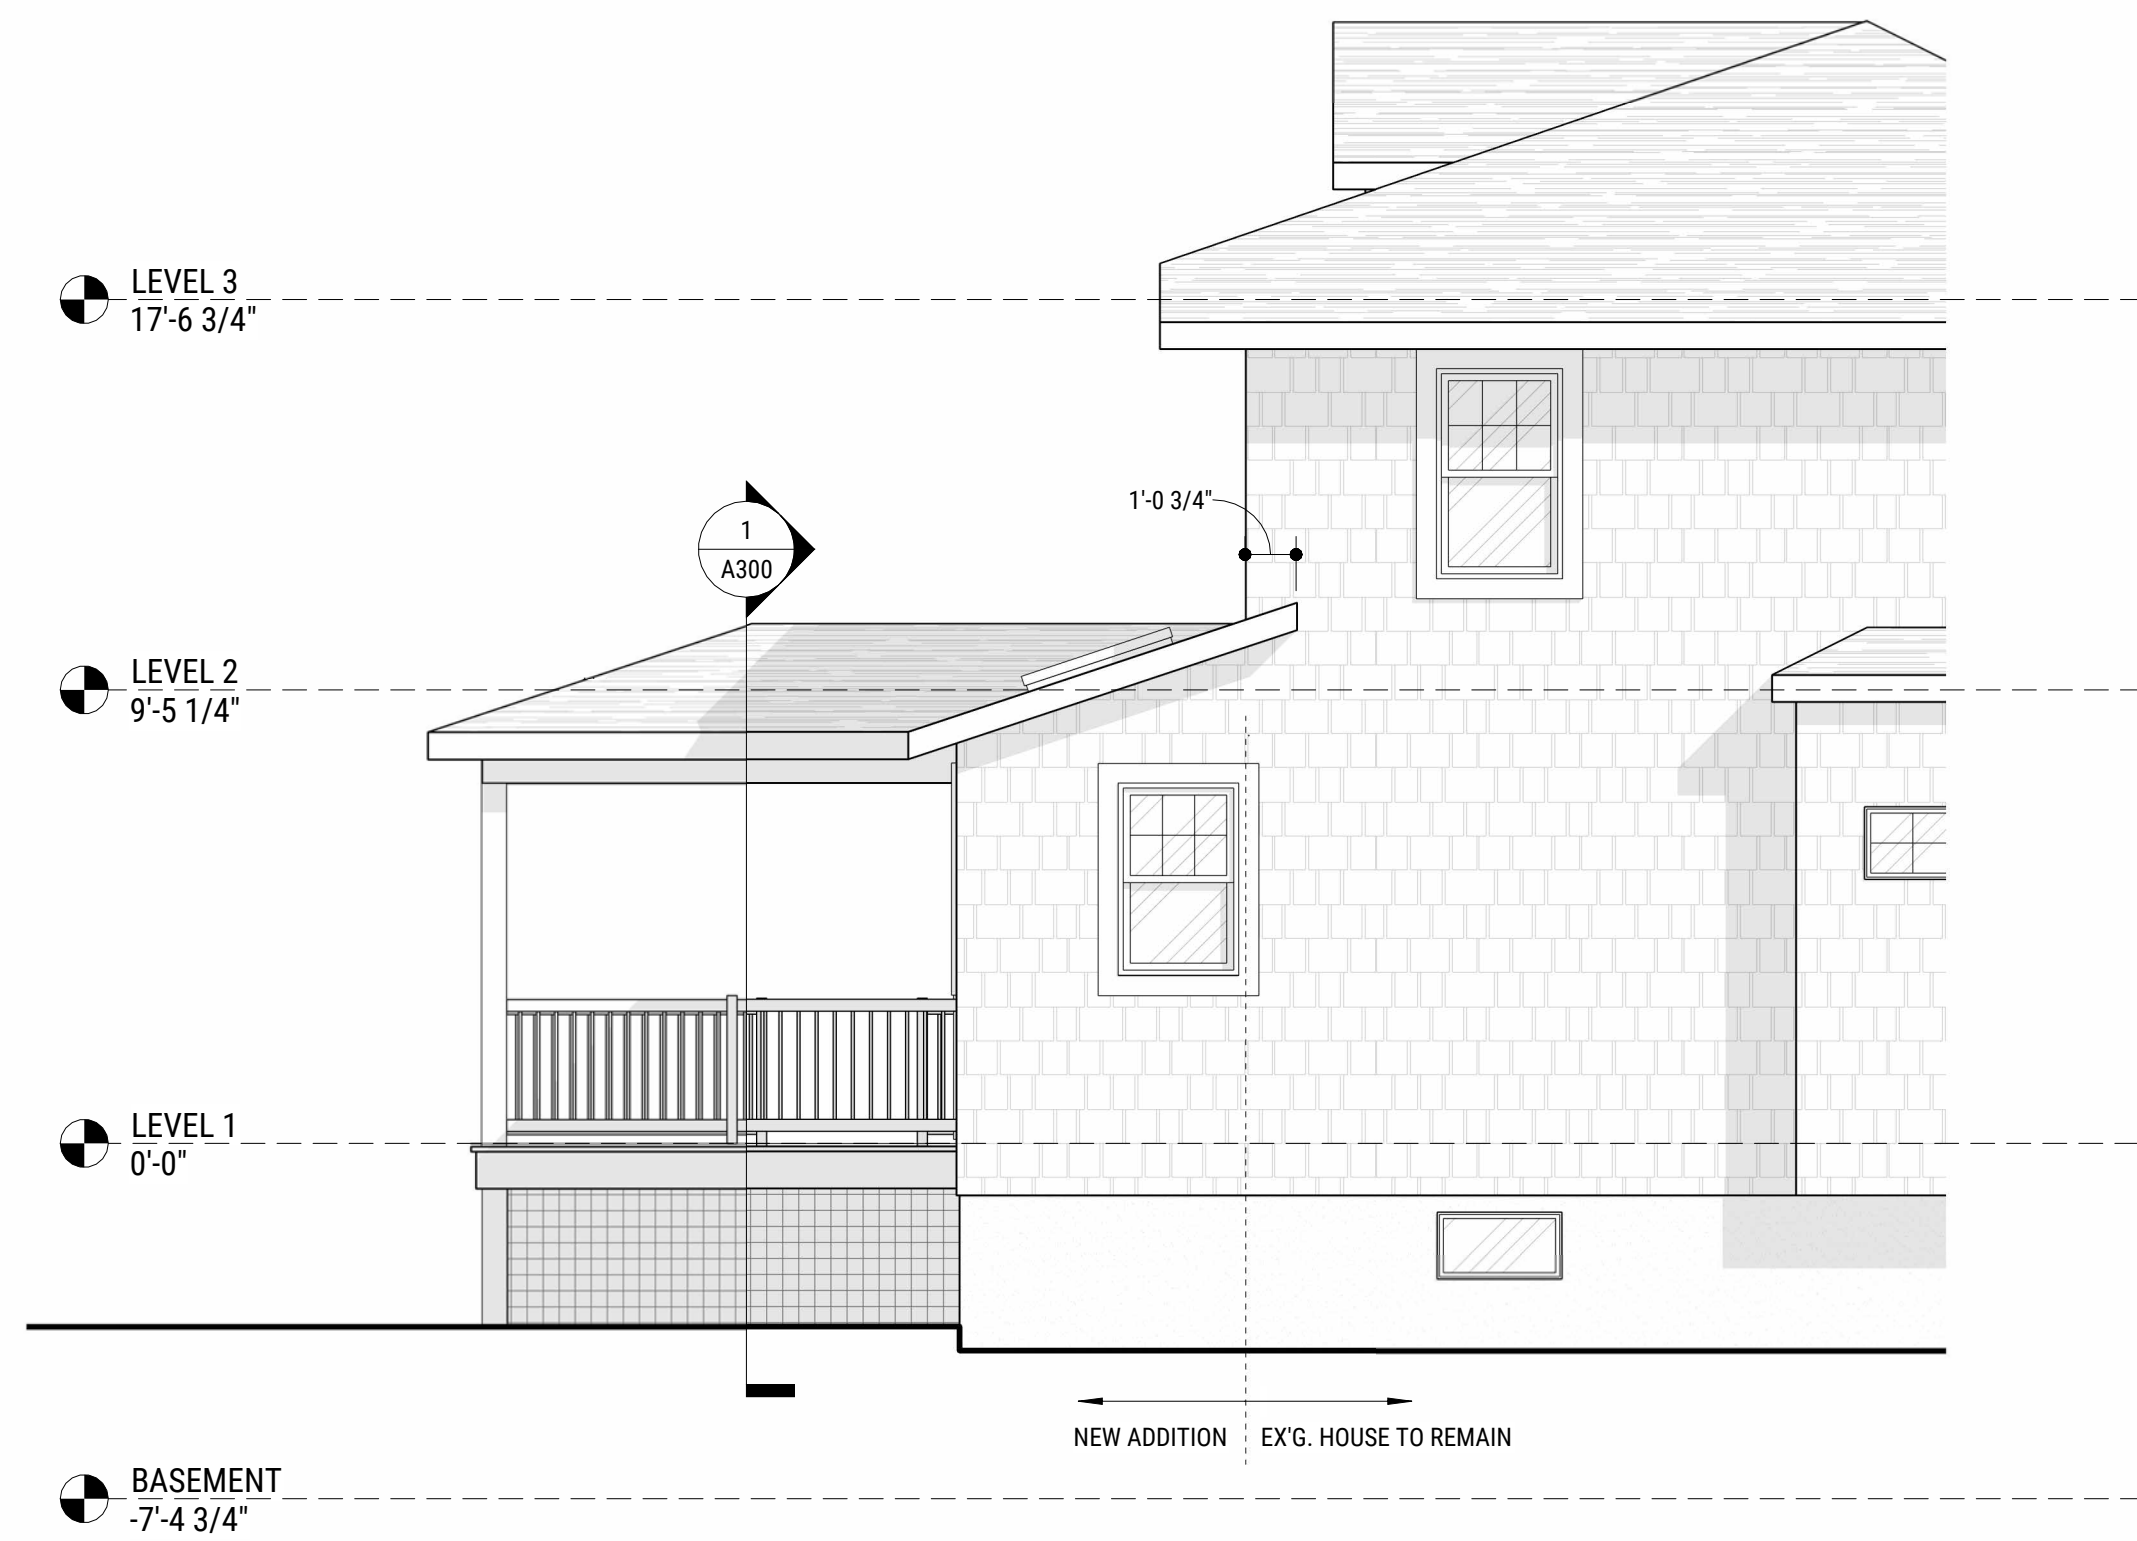


1
 A200
 EXTERIOR ELEVATION - LEFT
 1/4" = 1'-0"

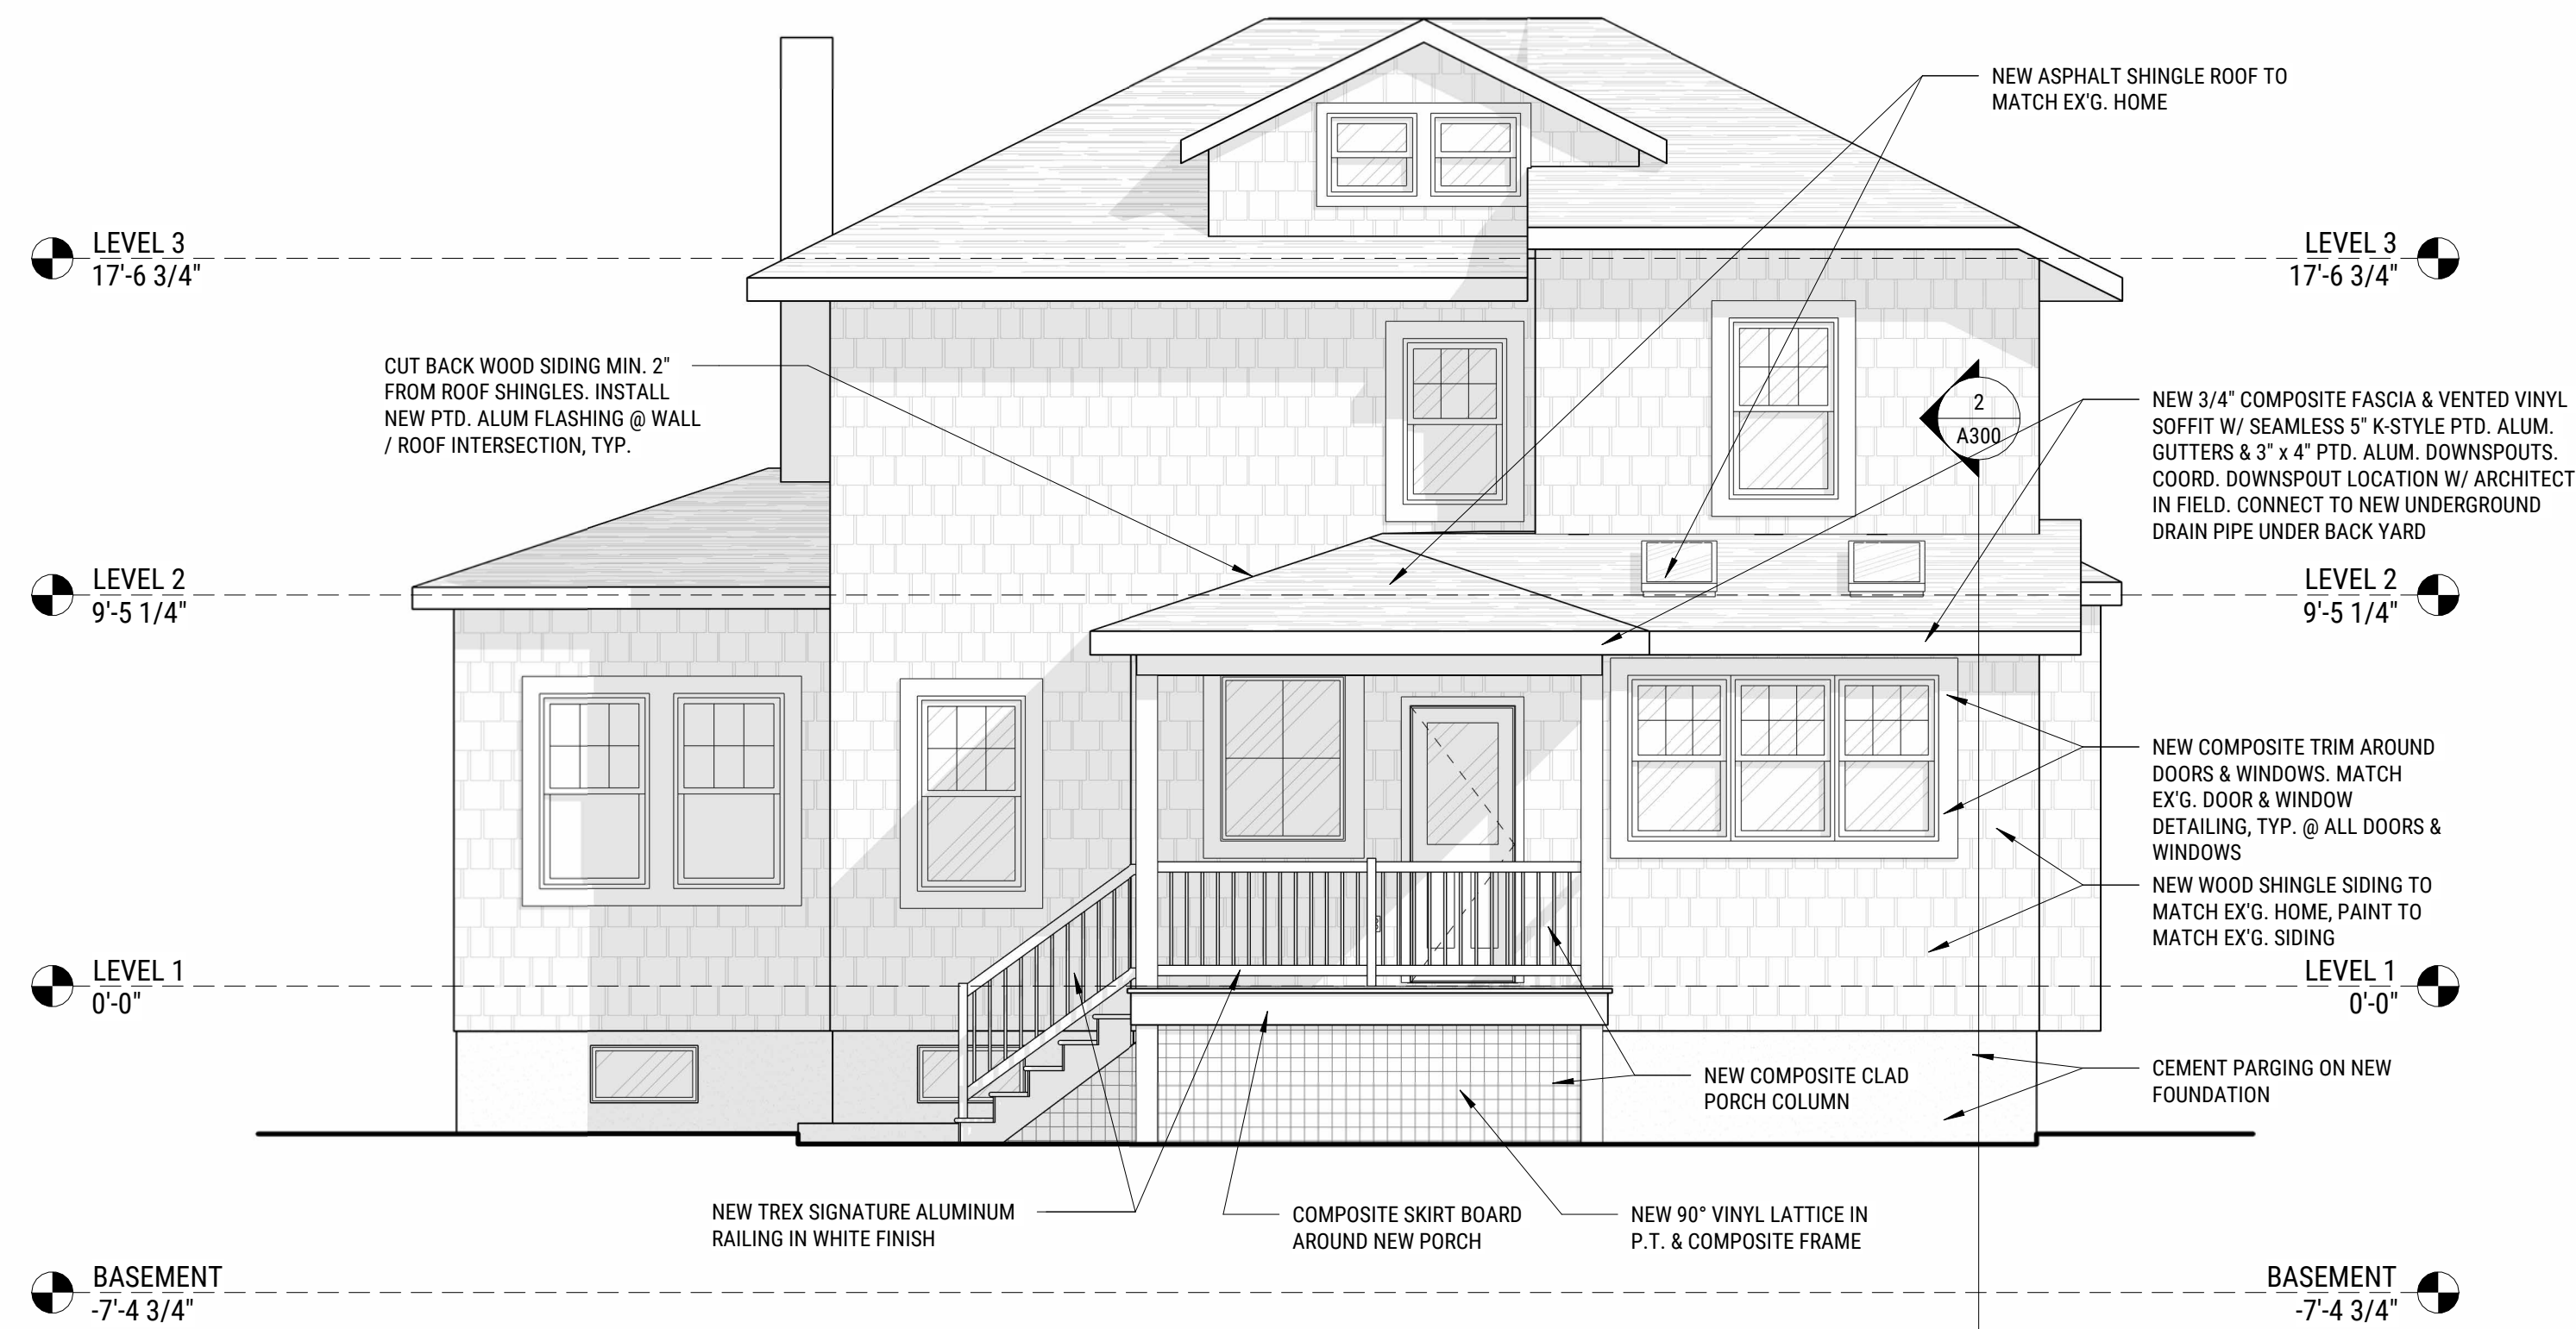


2
 A200
 EXTERIOR ELEVATION - REAR
 1/4" = 1'-0"



3
 A200
 EXTERIOR ELEVATION - RIGHT
 1/4" = 1'-0"


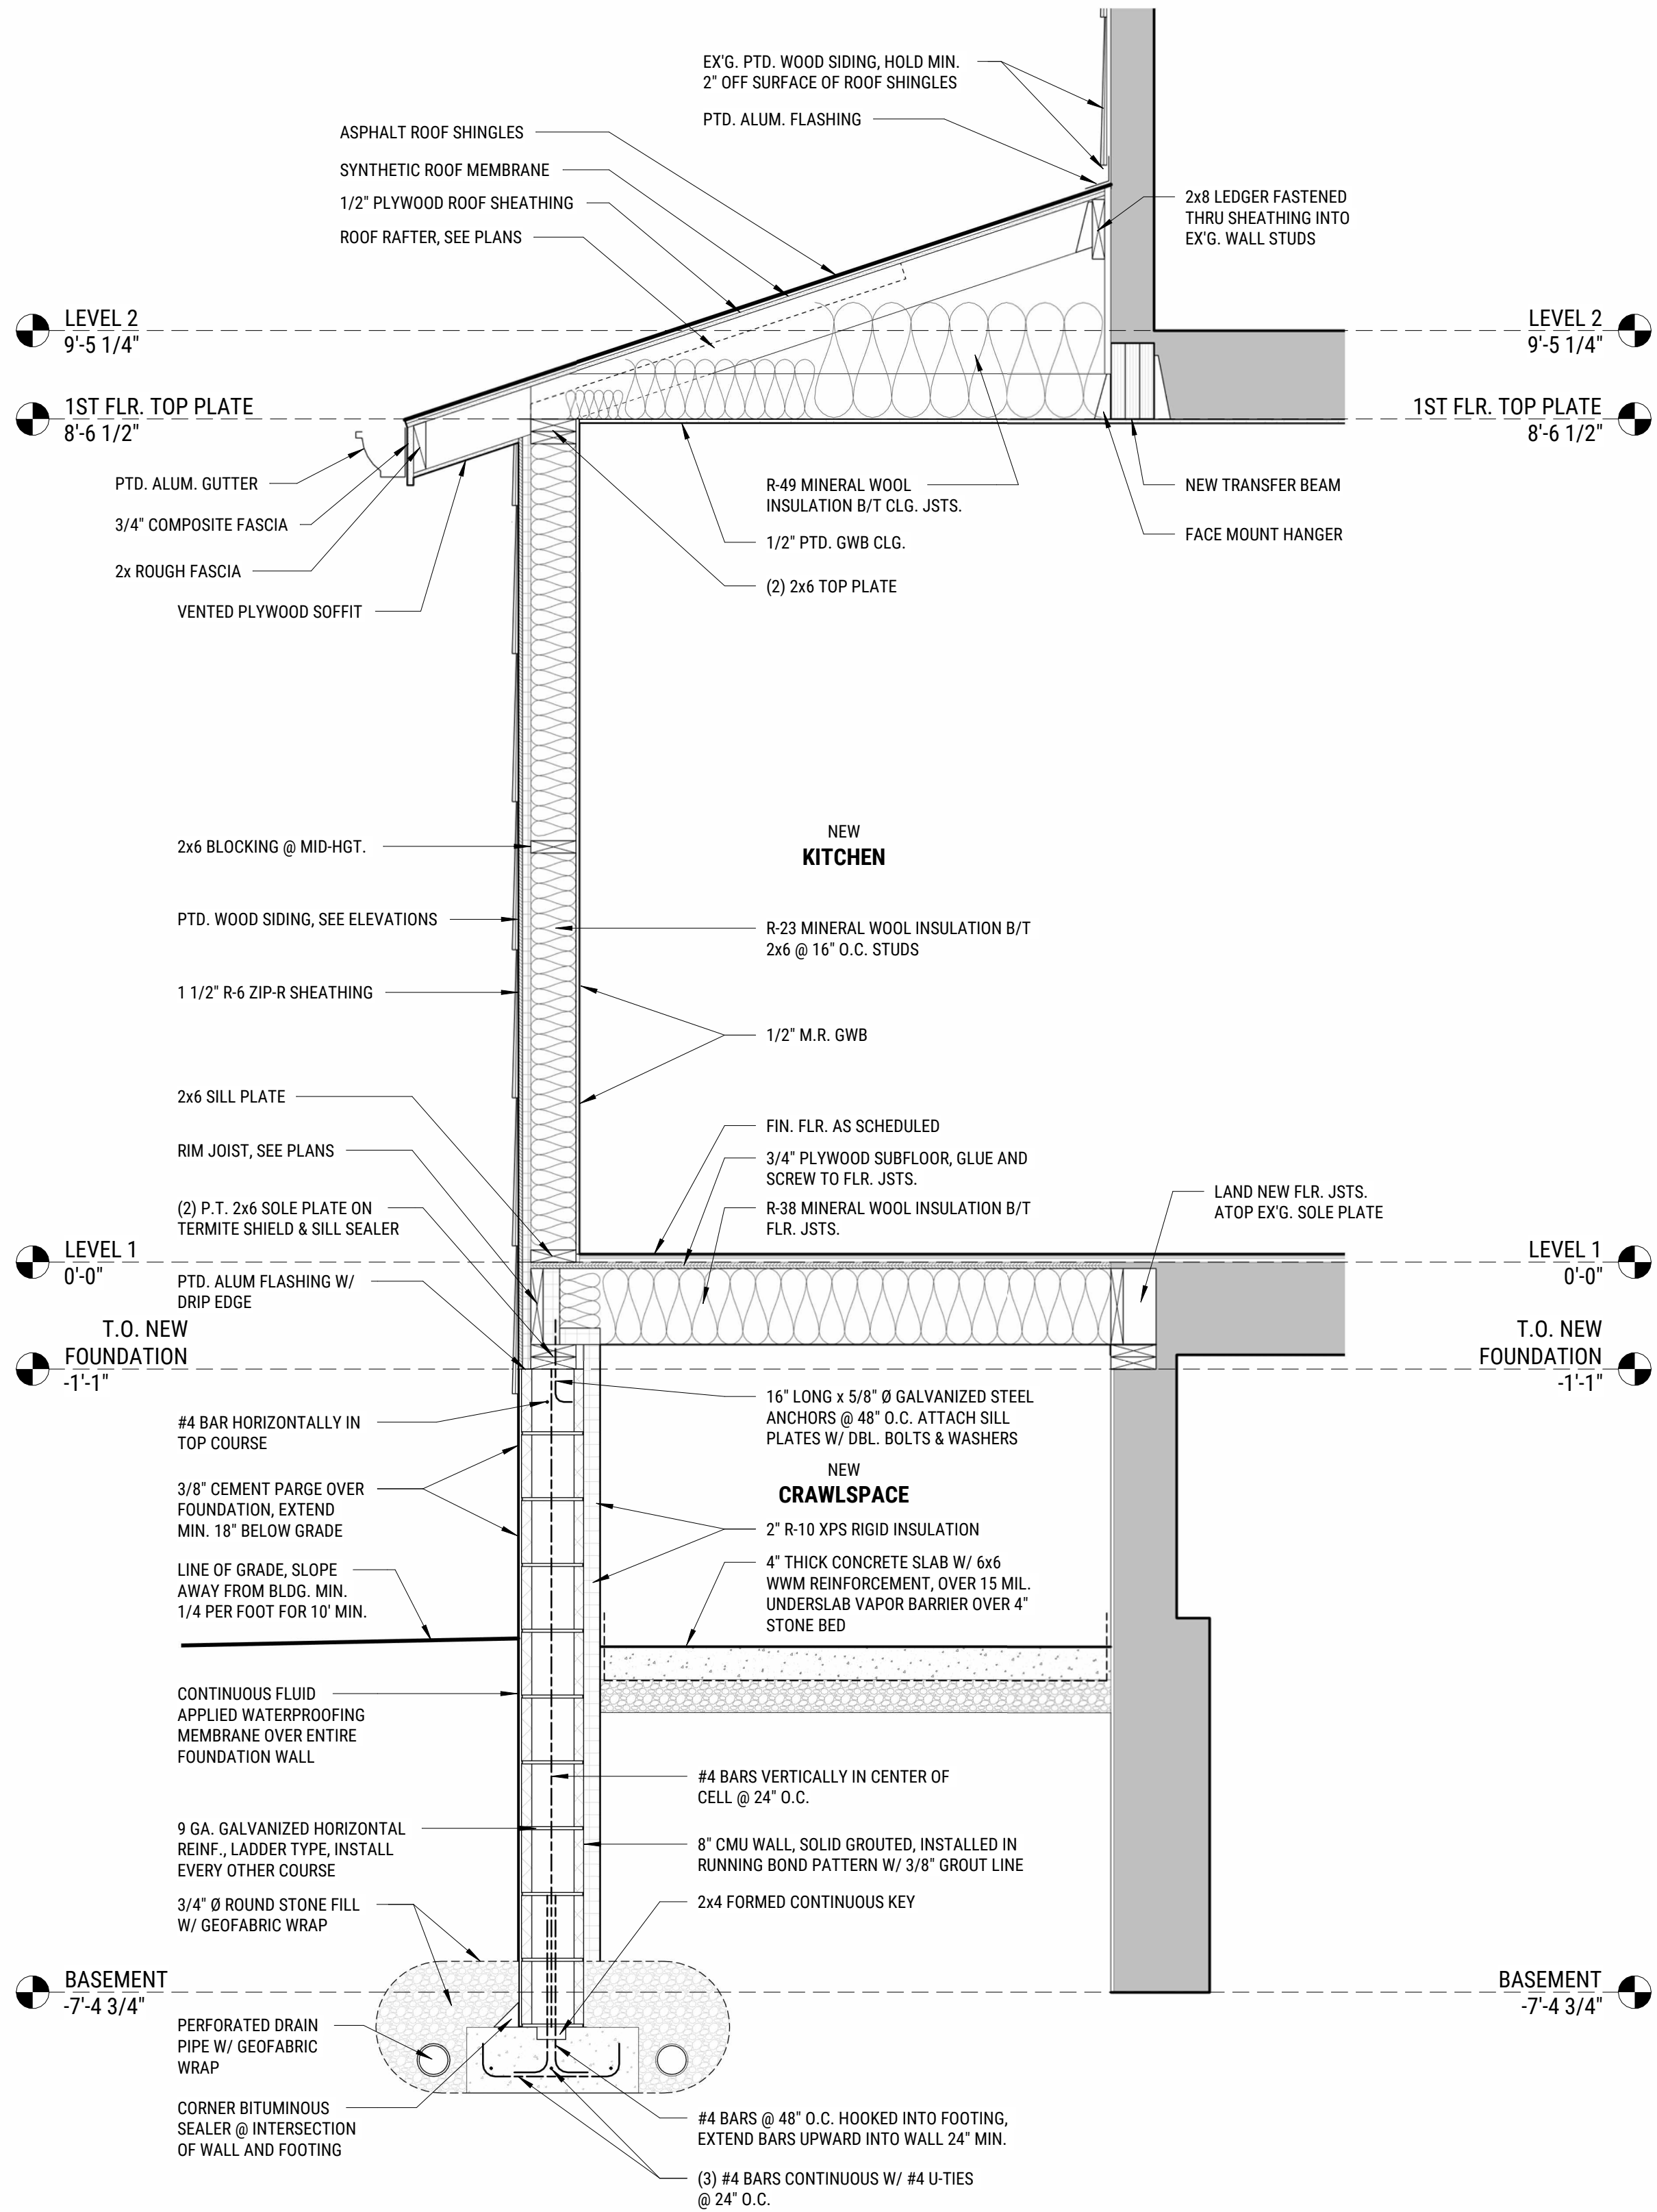


2 SECTION - REAR KITCHEN
A300 3/4" = 1'-0"

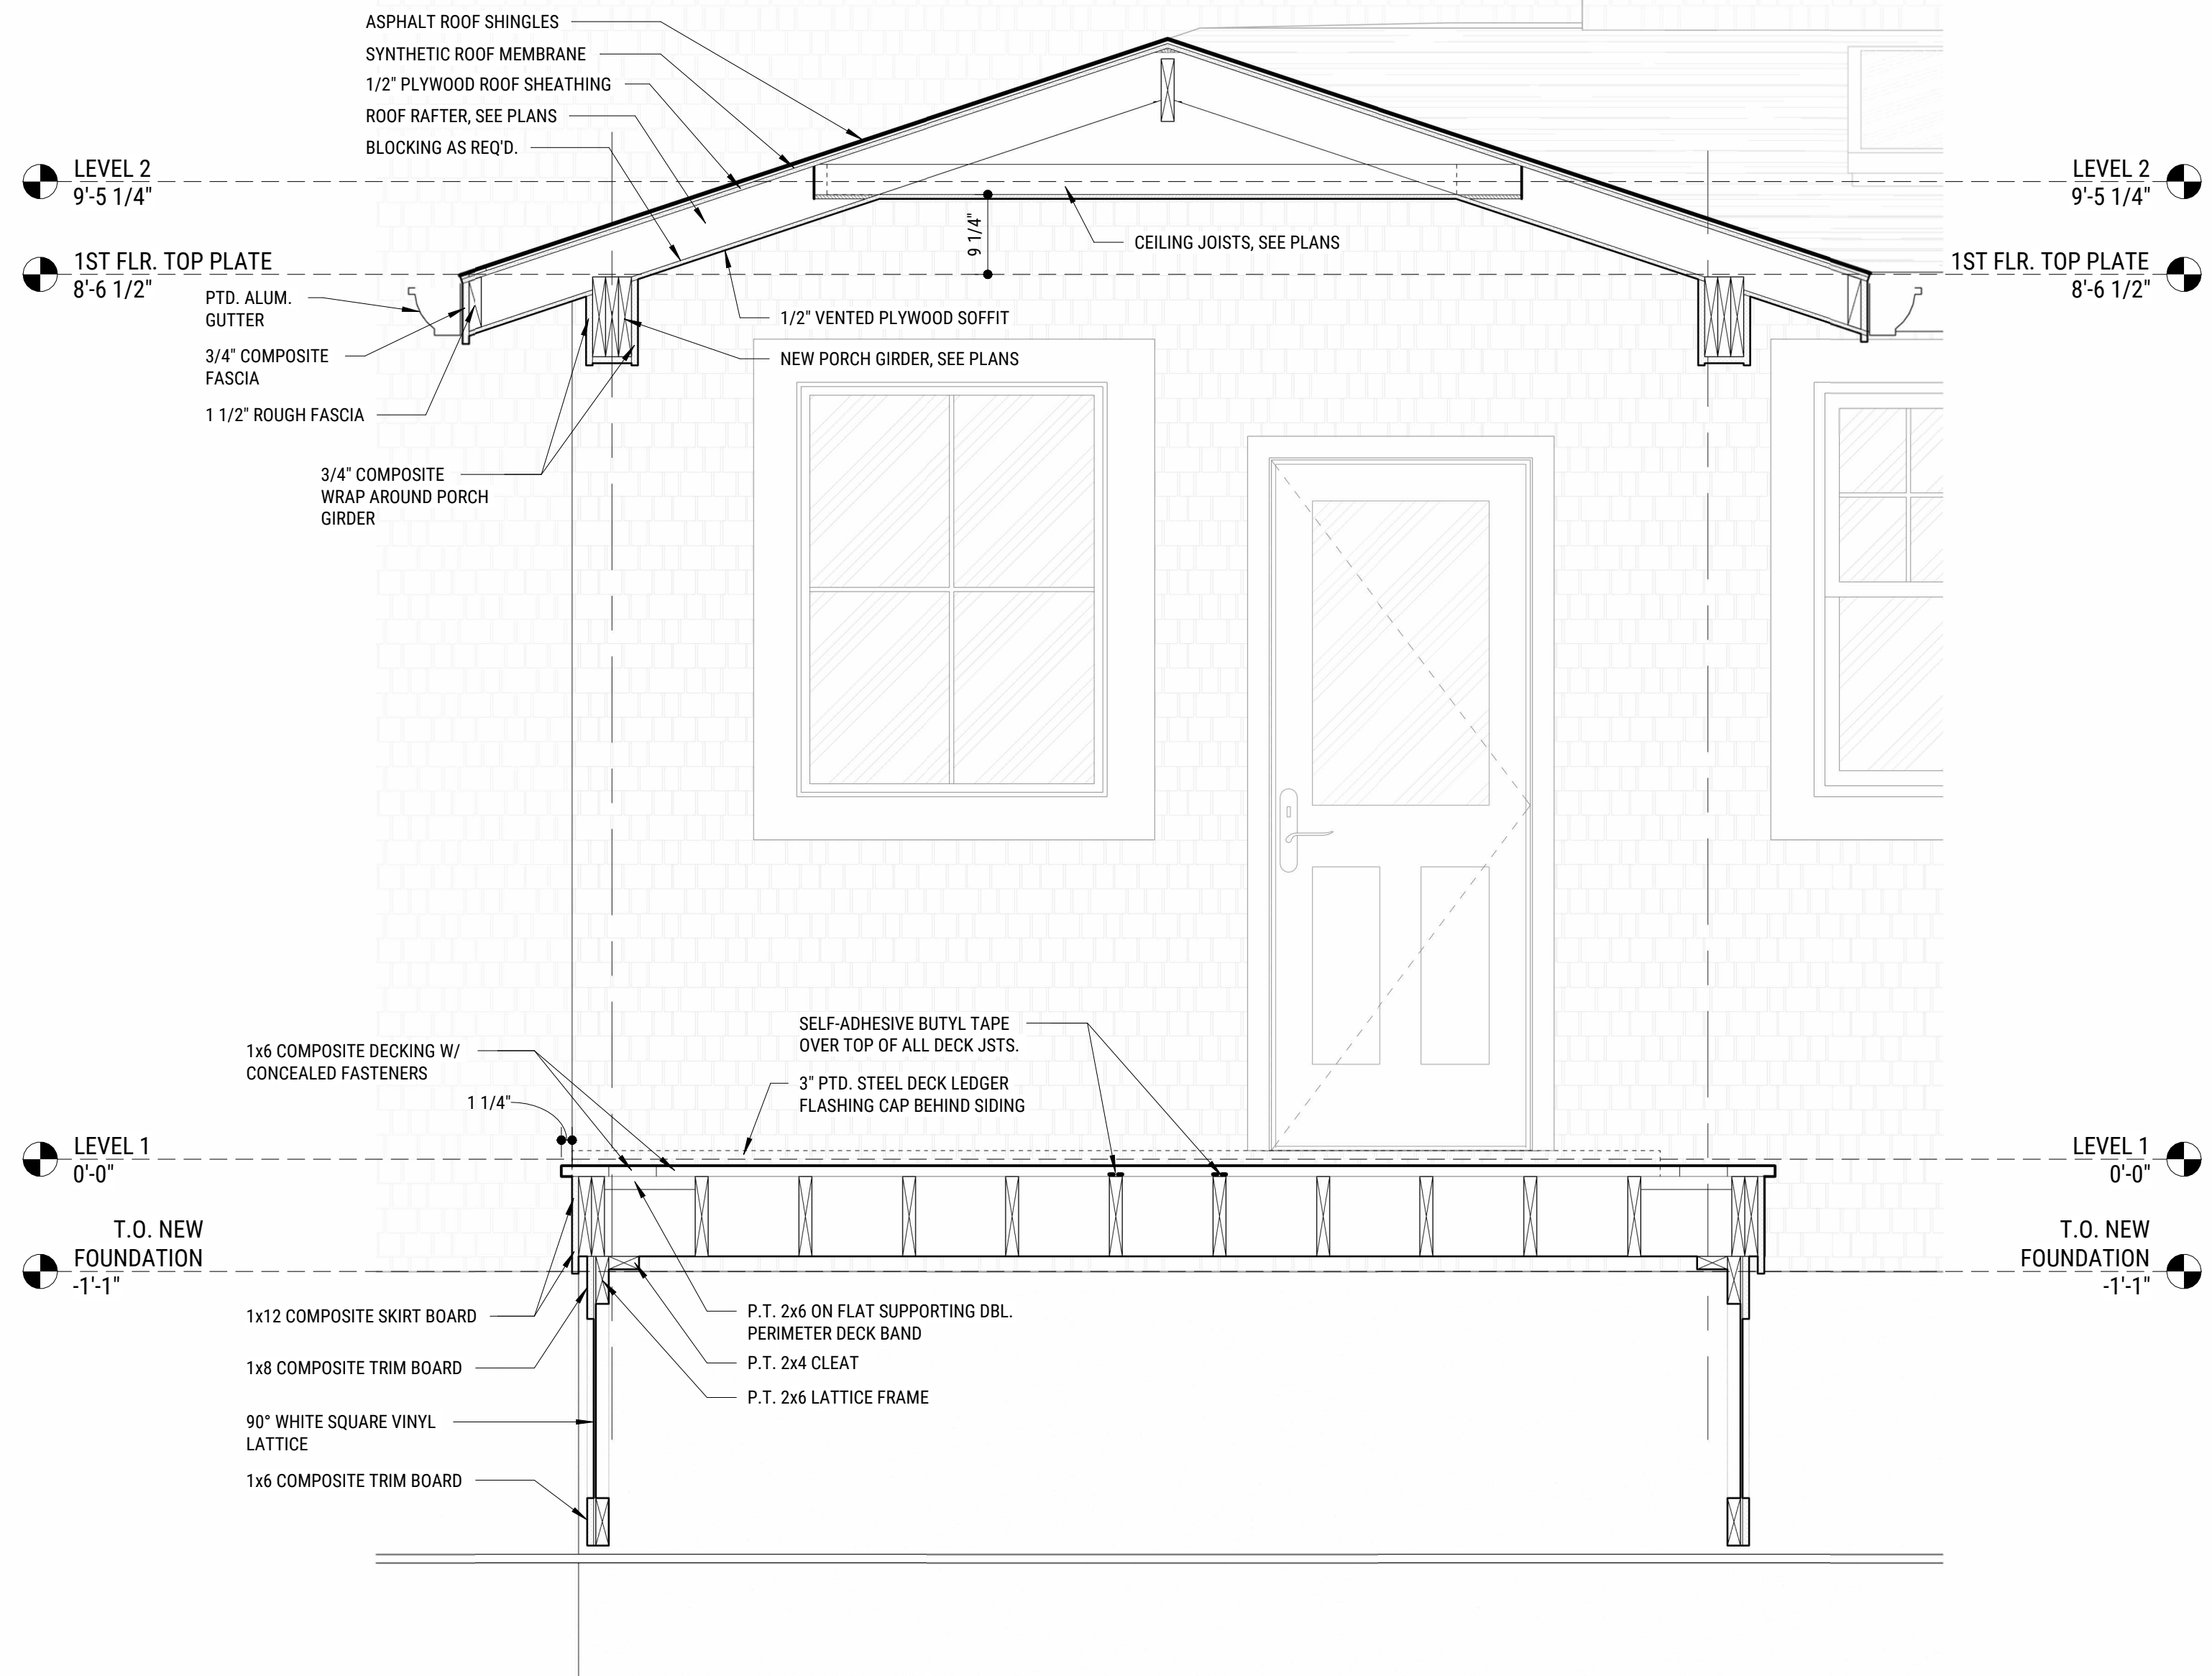

1 SECTION - NEW PORCH
A300 3/4" = 1'-0"

ISSUANCES	
SCHEMATIC DESIGN	2025.06.18
SCHEMATIC DESIGN 2	2025.06.27
DESIGN DEVELOPMENT	2025.08.01
CLIENT REVIEW	2025.12.04
CLIENT REVIEW	2026.01.16
ISSUED FOR BID	2026.01.22

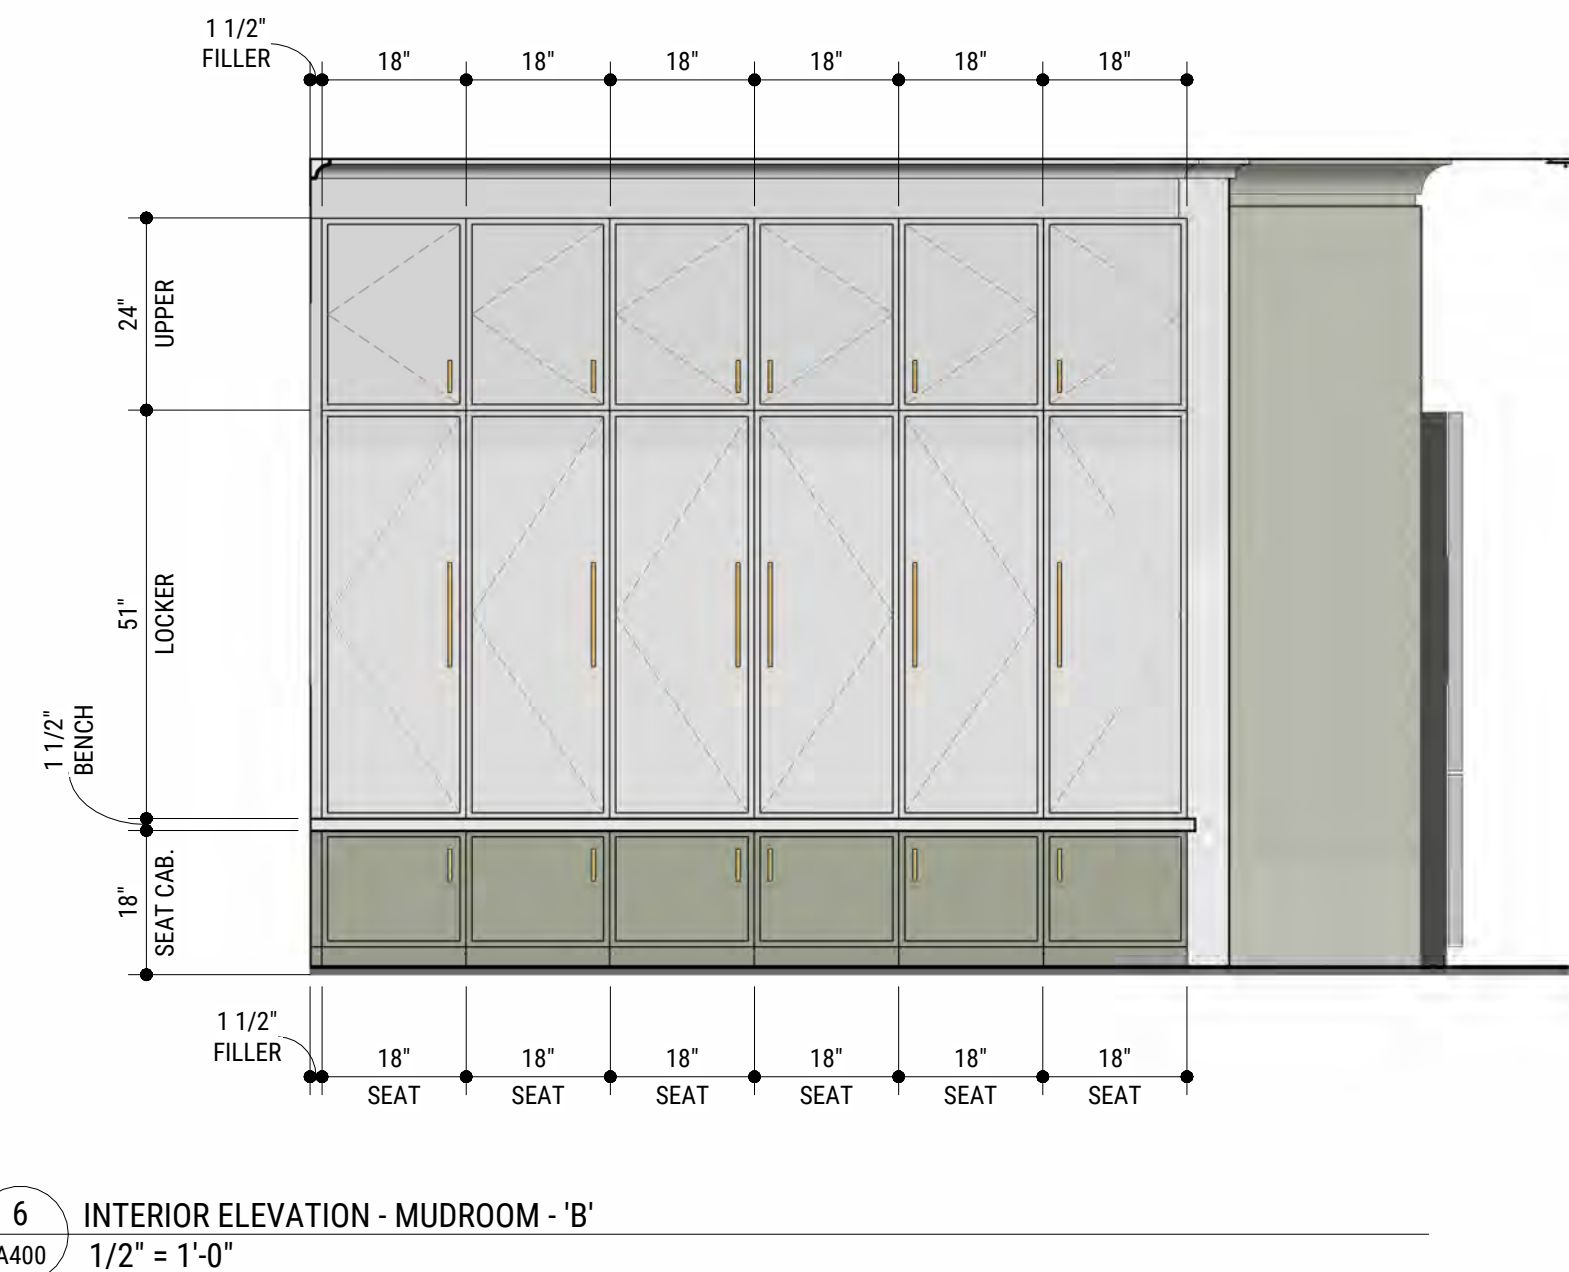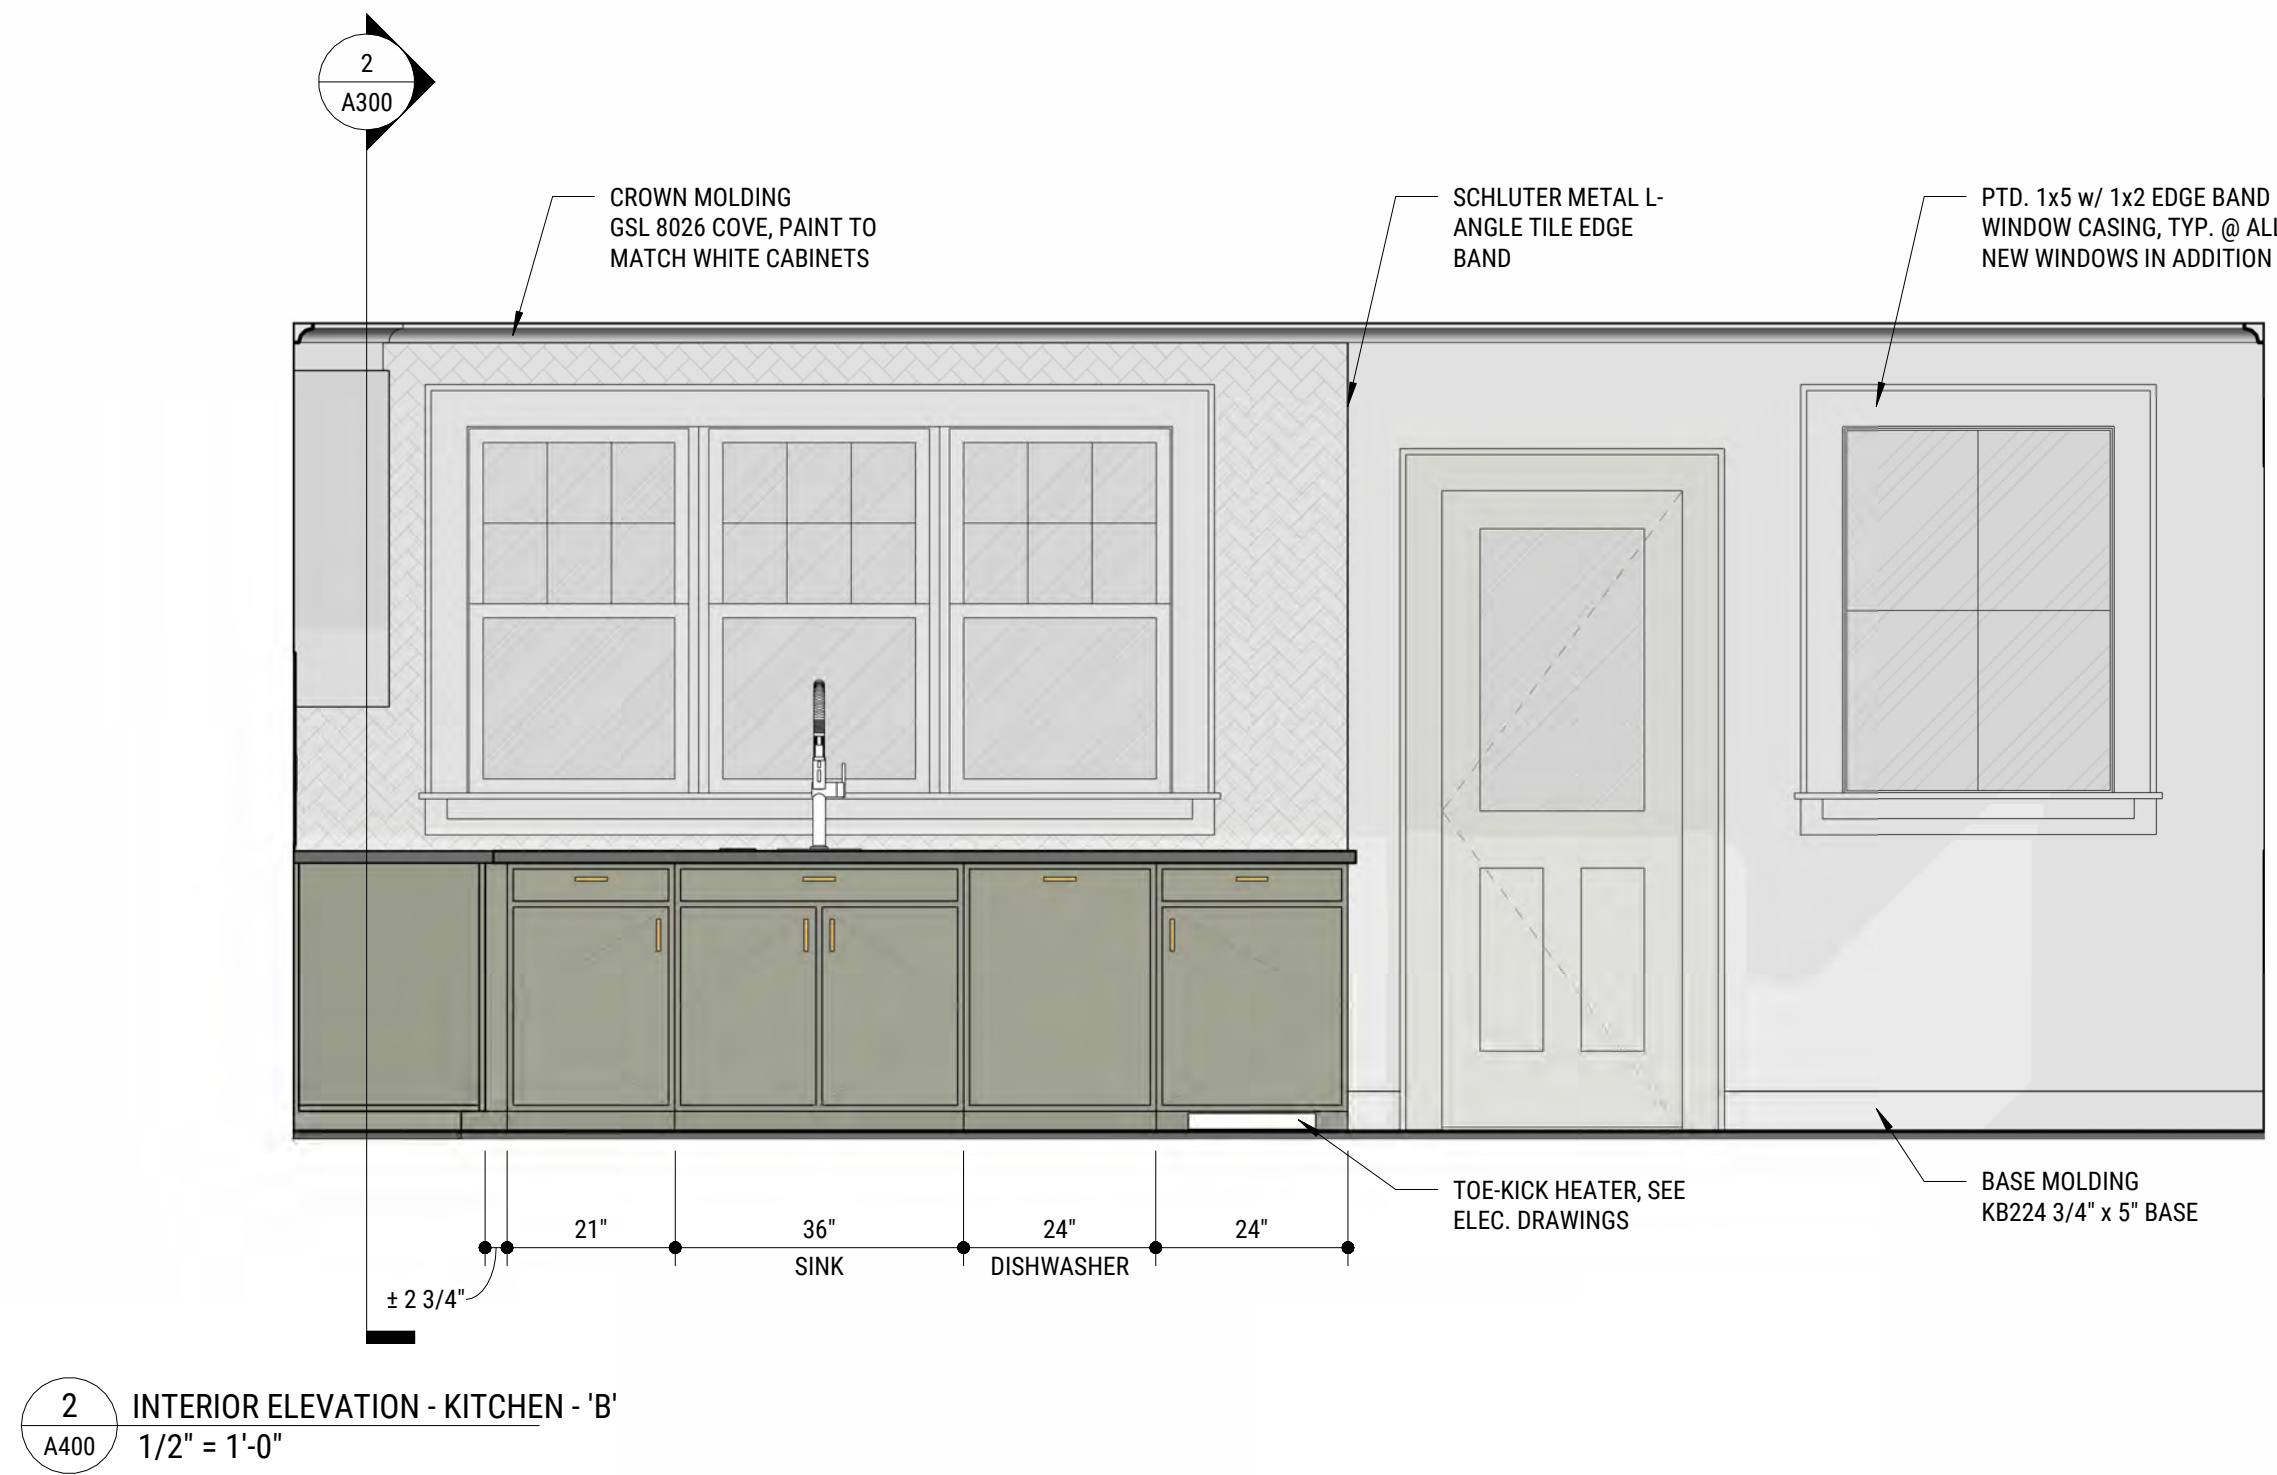



MARK	WIDTH	HEIGHT	THICKNESS	STYLE	MANUFACTURER	MODEL	FIRE RATING	U-VALUE	NOTES
001	30"	74"	1 3/8"	HALF-LITE	THERMA-TRU	SMOOTH-STAR S6021	N.R.	0.30	CUSTOM HEIGHT, COORD. W/ MANUF. FIELD PAINT, SEE INTERIOR PACKAGE
101	30"	80"	1 3/8"	HALF-LITE	THERMA-TRU	SMOOTH-STAR S6021	N.R.	0.30	FIELD PAINT, SEE INTERIOR PACKAGE, PROVIDE COORDINATING ANDERSEN 10 SERIES PTD. ALUM. SCREEN DOOR
102	27"	80"	1 3/8"	TWO-PANEL	REEB	CAMBRIAN SOLID CORE	N.R.		COORDINATE DOOR HEIGHT W/ EX'G. STAIR FRAMING, FIELD PAINT ALL SIDES OF DOOR, SEE INTERIOR PACKAGE

MARK	WIDTH	HEIGHT	HEAD HEIGHT	TYPE	MANUFACTURER	Model	U-Value	SHGC	Notes
101	30"	48"	7'-6"	DOUBLE HUNG	MARVIN	ELEVATE	0.30	0.4	
102	30"	48"	7'-6"	DOUBLE HUNG	MARVIN	ELEVATE	0.30	0.4	
103	30"	48"	7'-6"	DOUBLE HUNG	MARVIN	ELEVATE	0.30	0.4	
104	30"	48"	7'-6"	DOUBLE HUNG	MARVIN	ELEVATE	0.30	0.4	
105	36"	48"	7'-6"						
106	36"	48"	7'-0"	DOUBLE HUNG	MARVIN	ELEVATE	0.30	0.4	
201	30"	48"	6'-2 1/4"	DOUBLE HUNG	MARVIN	ELEVATE	0.30	0.4	PROVIDE TEMPERED SAFETY GLASS, HEAD HEIGHT MEASURED FROM T.O. 2ND FLOOR
202	21"	38"		SKYLIGHT	VELUX				
203	21"	38"		SKYLIGHT	VELUX				

MRVN ARCHITECTURE, LLC
307 BLOOMFIELD AVENUE
SUITE 201
CALDWELL, NJ 07006
T. 646.470.2221
www.mrvnarch.com

ISSUANCES

CLIENT REVIEW	2025.12.04
CLIENT REVIEW	2026.01.16
ISSUED FOR BID	2026.01.22

PROJECT NAME **SCHNORR RESIDENCE**
35 MADISON AVENUE MAPLEWOOD, NJ 07040

SAVING NAME

SCHEDULES & DETAILS

ARCHITECT OF RECORD
MICHAEL J. MARVIN, JR., R
NJ - 21A102024400

A500



CES

[illegible]

A900



A900



A900



07040



ASCO

ARCHITECT OF RECORD
MICHAEL J. MARVIN, JR., RA
NJ - 21AI02024400